

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 579 514 B1

(12)

## EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention  
of the grant of the patent:  
15.09.1999 Bulletin 1999/37

(51) Int Cl.<sup>6</sup>: H04N 7/24, H04N 5/92

(21) Application number: 93305641.8

(22) Date of filing: 19.07.1993

## (54) High efficiency encoding/decoding system

System zur Kodierung/Dekodierung mit hoher Wirksamkeit

Système de codage/décodage à haute efficacité

(84) Designated Contracting States:  
DE FR GB NL

(30) Priority: 17.07.1992 JP 19104592  
12.02.1993 JP 2456293

(43) Date of publication of application:  
19.01.1994 Bulletin 1994/03

(73) Proprietor: KABUSHIKI KAISHA TOSHIBA  
Kawasaki-shi, Kanagawa-ken 210-8572 (JP)

(72) Inventor: Shimoda, Kenji,  
c/o Intellectual Property Division  
Minato-ku, Tokyo (JP)

(74) Representative:  
O'Connell, David Christopher et al  
Haseltine Lake & Co.,  
Imperial House,  
15-19 Kingsway  
London WC2B 6UD (GB)

## (56) References cited:

EP-A- 0 536 630

EP-A- 0 546 865

WO-A-91/10329

- SIGNAL PROCESSING: IMAGE COMMUNICATION, vol. 1, no. 1, June, 1989, Elsevier Science Publishers, Amsterdam, NL, XP000234859, page 45-54; 'Video codec standardization in CCITT study group XV'
- SIGNAL PROCESSING: IMAGE COMMUNICATION, vol. 2, no. 2, August, 1990, Elsevier Science Publishers, Amsterdam, NL, XP000243479, page 221-239; 'Draft revision of recommendation H.261: video codec for audiovisual services at px64 kbit/s'

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 579 514 B1

**Description**

**[0001]** The present invention relates generally to a high efficient encoding/decoding system, and more particularly, to a high efficient encoding/decoding system suited for recording and playback on TV broadcasting and on recording media.

**[0002]** Various proposals have been proposed in recent years for the standardization of high efficient encoding for compressing video data. The high efficient encoding technique is to encode video data at more lower bit rate for improving the efficiency of digital transmission and recording. For instance, the CCITT (Comite Consultatif International Telegraphique et Telephonique or International Telegraph and Telephone Consultative Committee) has issued a recommendation for video-conference/video-telephone standardization H.261. According to the CCITT Recommendation, the encoding is made using the intra-frame compression processed frame I and the inter-frame compression processed (or the predictive frame compression processed) frame P.

**[0003]** Referring now to FIGURE 1, the video data compression standard according to the CCITT Recommendation will be explained.

**[0004]** The intra-frame compression processed frame I is one frame of video data encoded by the DCT (Discrete Cosine Transform) processing. The inter-frame compression processed frame P is the video data encoded by the predictive encoding using the intra-frame compression processed frame I or the inter-frame compression processed frame P. In addition, more reduction of bit rate has been made by these encoded data to the encoded in variable length code data. As the intra-frame compression processed frame I was encoded by the intra-frame information only, it is possible to decode the intra-frame compression processed frame I by a single encoded data only. The inter-frame compression processed frame P was encoded by correlations to other video data, thus the inter-frame compression processed frame P being impossible to decode by a single encoded data only.

**[0005]** FIGURE 2 is a block diagram showing the recording section of a conventional recording/playback apparatus using such the predictive encoding.

**[0006]** The luminance signal Y and color difference signals Cr and Cb are applied to a multiplexer 11, where they are multiplexed in block of 8 columns and 8 rows (or 8 x 8 block). Sampling rate of the color difference signals Cr in the horizontal direction is 1/2 of the luminance signal Y. Therefore, in the period when two 8 x 8 luminance (Y) blocks are sampled, one 8 x 8 block of the color difference signals Cr and Cb is sampled. As shown in FIGURE 3, two luminance signal blocks Y and two colour difference signal blocks Cr and Cb, thus four blocks in total forms a macro block (MB). Here, two luminance signal blocks y and each of the color difference signal blocks Cr and Cb represent the same position on the picture frame. Further, a plurality of macro blocks compose a GOB (group of block) and a plurality of GOBs compose one frame. The output of the multiplexer 11 is applied to a DCT unit 13 through a subtracter 12.

**[0007]** When performing the intra-frame compression, a switch 14 is kept OFF and the output of the multiplexer 11 is applied directly to the DCT unit 13 as described later. A signal composed of 8 x 8 pixels block is applied to the DCT unit 13. The DCT unit 13 converts the input signal into frequency components through the 8 x 8 two dimensional DCT processing. This makes it possible to reduce the spatial correlative components. The output of the DCT unit 13 is applied to a quantizer 15 which lowers one block signal redundancy by requantizing the DCT output using a fixed quantization coefficient. Further, block pulses are supplied to the multiplexer 11, the DCT unit 13, the quantizer 15, etc, which operate in unit of block.

**[0008]** The quantized data from the quantizer 15 is applied to a variable length encoder 16 and is, for instance, encoded to the Huffman codes based on the result calculated from the statistical code amount of the quantized output. As a result, a short time sequence of bits is assigned to data having a high appearance probability and a long time sequence of bits to data having a low appearance probability and thus, the transmission amount is further reduced. The output of the variable length encoder 16 is applied to an error correcting encoder 17, which provides the output from the variable length encoder 16 with an error correcting parity added to a multiplexer 19.

**[0009]** The output of the variable length encoder 16 is also applied to an encoding controller 18. The amount of the output data varies largely depending on input picture signal. So, the encoding controller 18 monitors the amount of the output data from the variable length encoder 16 and adjusts the amount of the output data by controlling the quantization coefficient of the quantizer 15. Further, the encoding controller 18 may restrict the amount of the output data by controlling the variable length encoder 16.

**[0010]** A sync/ID generator 20 generates a frame sync signal and an ID signal representing data contents and additional information and provides them to the multiplexer 19. The multiplexer 19 forms one sync block data with a sync signal, an ID signal, a compressed signal data and a parity and provides these data to a recording encoder (not shown). The recording encoder, after recording/encoding the output from the multiplexer 19 according to characteristics of a recording medium, records the encoded data on a recording medium (not shown).

**[0011]** If the switch 14 is ON, the current frame signal from the multiplexer 11 is subtracted from the motion compensated preceding frame data, which will be described later, in the subtracter 12 and applied to the DCT unit 13. In this case the inter-frame encoding is carried out to encode differential data using a redundancy of the inter-frame picture.

When a difference between the preceding frame and the current frame is merely obtained, it will become large if there is any motion in the picture. So, the difference is made small by compensating the motion by obtaining a difference at the pixel position corresponding to the motion vector while detecting the motion vector by obtaining the position of the preceding frame corresponding to the prescribed position of the current frame.

[0012] That is, the output of the quantizer 15 is also applied to an inverse quantizer 21. This quantized output is inverse quantized in the inverse quantizer 21 and further, inverse DCT processed in an inverse DCT unit 22 and restored to the original video signal. Further, the original information cannot be reconstructed completely in the DCT processing, requantization, inverse quantization and inverse DCT processing and part of the information lacks. In this case, as the output of the subtracter 12 is a differential information, the output of the inverse DCT unit 22 is also a differential information. The output of the inverse DCT unit 22 is applied to an adder 23. The output from the adder 23 is fed back through a variable delay unit 24 which delays signals by about one frame period and a motion compensator 25, and the adder 23 reproduces the current frame data by adding differential data to the preceding frame data and provides them to the variable delay unit 24.

[0013] The preceding frame data from the variable delay unit 24 and the current frame data from the multiplexer 11 are applied to a motion detector 16 where a motion vector is detected. The motion detector 26 obtains a motion vector through a full search motion detection by, for instance, a matching calculation. In the full search type motion detection, the current frame is divided into the prescribed number of blocks and the search range of, for instance, a 15 x 8 pixels block is set for each block. In the search range corresponding to the preceding frame, the matching calculation is carried out for each block and an inter-pattern approximation is calculated. Then, by calculating the preceding frame block which provides the minimum distortion in the search range, the vector which is obtained by the preceding frame block and the current frame block is detected as the motion vector. The motion detector 26 provides the motion vector thus obtained to the motion compensator 25.

[0014] The motion compensator 25 extracts a corresponding block data from the variable delay unit 24, compensates it according to the motion vector and provides it to the subtracter 12 through the switch 14 and also, to the adder 23 after making the time adjustment. Thus, the motion compensated preceding frame data is supplied from the motion compensator 25 to the subtracter 12 through the switch 14. When the switch 14 is ON, the inter-frame compression mode results. While if the switch 14 is OFF, the intra-frame compression mode results.

[0015] The switch 14 is turned ON/OFF based on a motion signal. That is, the motion detector 26 generates the motion signal depending on whether the motion vector size exceeds over a prescribed threshold value and applies it to a logic unit 27. The logic unit 27 controls the ON/OFF of the switch 14 by the logical judgement using the motion signal and a refresh periodic signal. The refresh periodic signal is a signal representing the intra-frame compression processed frame I, as shown in FIGURE 1. If the input of the intra-frame compression processed frame I is represented by the refresh periodic signal, the logic unit 27 turns OFF the switch 14 irrespective of the motion signal. Further, if the motion signal represents that the motion is relatively fast and the minimum distortion by the matching calculation exceeds the threshold value, the logic unit 27 turns OFF the switch 14. Thus the intra-frame compression encoding is carried out for each block even when the inter-frame compression processed frame P data are input. TABLE 1, as shown below, represents the ON/OFF control of the switch 14 by the logic unit 27.

TABLE 1

Frame I	Intra-frame Compression Processed Frame	Switch 14 OFF
Frame P	Motion Vector Detected Inter-frame Compression Processed Frame	Switch 14 ON
	Motion Vector Unknown Inter-frame Compression Processed Frame	Switch 14 OFF

[0016] FIGURE 4 is an explanatory diagram showing the data stream of record signals which are output from the multiplexer 19.

[0017] As shown in FIGURE 4, the first and the sixth frames of the input video signal are converted into intra-frame compression processed frames 11 and 16, respectively. While the second through the fifth frames are converted into inter-frames compression processed frames P1 through P5. The ratio of the data amount between the intra-frame compression processed frame I and the inter-frame compression processed frame P is (3-10):1. The amount of data

of the intra-frame compression processed frame I is relatively large, while the amount of data of the inter-frame compression processed frame P is extremely reduced. Further, the data of the inter-frame compression processed frame P cannot be decoded unless other frame data are decoded.

[0018] FIGURE 5 is a block diagram illustrating the decoding section (playback section) of a recording/playback apparatus.

[0019] Compressed encoded data recorded on a recording medium is played back through a playback head (not shown) and then applied into an error correction decoder 31. The error correction decoder 31 corrects errors occurred in a data transmission and a data recording. The played back data from the error correction decoder 31 are applied to a variable length data decoder 33 through a code buffer memory 32 and decoded to prescribed length data. Further, the code buffer memory 32 may be omitted.

[0020] The output of the variable length decoder 33 is processed an inverse-quantization in an inverse quantizer 34, and then decoded and restored to the original video signal by an inverse-DCT operation in an inverse DCT unit 35. The restored signal is applied to the terminal a of a switch 36. The output of the variable length decoder 33 is also applied to a header signal extractor 37. The header signal extractor 37 retrieves a header for determining whether the input data is the intra-frame compression data (intra-frame data) or the inter-frame compression data (inter-frame data) and then provides the header to the switch 36. When applied with the header for representing the intra-frame compression data, the switch 36 selects the terminal a of the switch 36 and outputs the decoded data from the inverse DCT unit 35.

[0021] The inter-frame compression data is obtained by adding together the output from the inverse DCT unit 35 and the preceding frame output from a predictive decoder 39 using an adder 38. That is, the output of the variable length decoder 33 is applied to a motion vector extractor 40 for obtaining the motion vector. The motion vector is then applied to the predictive decoder 39. The decoded output from the switch 36 is delayed for one frame period by a frame memory 41. The predictive decoder 39 compensates the preceding decoded data from the frame memory 41 according to the motion vector and provides them to the adder 38. The adder 38 applies inter-frame compression data to the terminal b of the switch 36 by adding the output from the predictive decoder 39 and the output from the inverse DCT unit 35 together. When the inter-frame compression data is applied, the switch 36 selects the terminal b by the header and outputs the decoded data from the adder 38. Thus, the compression and the expansion of data are carried out without delay in both of the intra-frame compression mode and the inter-frame compression mode.

[0022] Various systems for recording such high efficient encoded digital video data on a magnetic video cassette recorder (VCR) have been developed. FIGURE 6 is an explanatory diagram for explaining the recording tracks produced on a recording medium by this VCR.

[0023] In FIGURE 6, A1, A2, .... etc., represent the recording tracks by a plus-azimuth head, while B1, B2, .... etc., represent the recording tracks by a minus-azimuth head. In this case, there is normally no problem especially in the playback operation. However, when the triple-speed mode playback is performed, the trace patterns by the heads are as illustrated by the arrow in FIGURE 6 and only the hatched section where the head azimuth agrees with the azimuth of the recording track is played back. Even in this case, one picture can be played back during an analog recording operation where an on-screen position and the recorded position on a recording medium correspond to each other. However, the intra-frame compression processed frame I and the inter-frame compression processed frame P differ each other in their encoded amounts. If the data stream, as shown in FIGURE 4, is recorded on a recording medium, one frame is not necessarily reconstructed from the played back data at the triple-speed mode playback. Further, the inter-frame compression processed frame P will not become able to playback when any undecoded frame is generated as in the triple-speed mode playback, because the inter-frame compression processed frame P cannot be decoded as an independent frame. Furthermore, as data are played back discontinuously in this case, data after an interruption occurred cannot be used efficiently in a system for decoding an input data train continuously such as a video telephone, etc.

[0024] So, in order to make data correspond to positions on the picture screen, it is considered to add block address information. However, undesired data other than video data may be added, thus lowering a data utilization coefficient. Further, it is also considered to record data on a recording medium with address information added in correspondence with the on-screen position at the receiving section or to reconstruct intra-frame compression data by changing the format to fit to the memory. But data required for executing the format transformation is not transmitted. Furthermore, an effective decode using discontinuous played back data is not performed.

[0025] Further, in the Japanese Patent Application (TOKU-GAN-HEI) P03-330650, the applicant of the present application has proposed "Variable Length Code Recording/Reproducing Apparatus" for format transformation and recording in a VTR without decoding received broadcasting signals. Furthermore, the applicant of the present application has also proposed "Transmission System" for adjusting data length and adding a skip code in consideration of a trick play operation of VCRs in the Japanese Patent Application (TOKU-GAN-HEI) P04-067610.

[0026] Here an MPEG (Moving Picture Experts Group) Standard 1 has been proposed as a compression technique of moving picture in a field of storage media. This MPEG Standard is adapted for semi-moving pictures at a transmission

rate of 1.2 Mbps. The MPEG Standard is adapted for a CD-ROM, etc. FIGURE 7 is an explanatory diagram showing the data structure of the MPEG Standard.

[0027] As illustrated in FIGURE 7, the data structure of the MPEG system is hierarchical and a start code has been added to all the layers with the exception of the macro block layer. The lowest block layer is constructed with the 8 x 8 pixels block. The size of one pixel (one block) differs between the luminance component and the color difference component, as their sampling periods are different each other. If a sampling ratio of the luminance component and the color difference component is 4 : 1, four luminance blocks correspond to one color difference block. For this reason, the macro block layer (corresponding to the small block in the "High Efficient Encoding/Decoding System") is constructed with a header added to two blocks each, total four blocks YO through Y3 and two blocks of color difference signals Cr and Cb in the column and row directions of the luminance component.

[0028] A slice layer (corresponding to the macro block in the "High Efficient Encoding/decoding System") composed of one or more macro blocks is formed by predictive encoding in the unit of this macro block, and one frame picture layer is formed by N pieces of the slice layer. Two-directional predictions, backward predictions, forward predictions or intra-picture predictions may be adopted for the predictive encoding of macro block. A GOP layer is constructed by several frames of picture layers. The GOP layer is constructed by bidirectional predictive frames (B pictures), forward predictive frames (P pictures) and intra-frame predictive frames (I pictures). For instance, if a prescribed frame is an I picture, all macro blocks are encoded for the slice layer using the intra-frame prediction. Further, in the case of a P picture frame, the macro blocks are encoded in the slice layer using the forward prediction or the intra-frame prediction. In the case of a B picture frame, the macro blocks are encoded using any one of the intra-frame prediction, the forward prediction and the backward prediction or both of the forward and the backward predictions. A video sequence layer is formed by a plurality of GOPs. Further, each of the headers of the video sequence layer, the GOP layer, the picture layer and the slice layer has a start code indicating the start of each layer, while the header of the macro block layer has a macro block address.

[0029] In the "High Efficient Encoding/Decoding System", a system including a macro block data length in a data string has been considered. However, in the MPEG system, no slice layer data length equivalent to this macro block data length exists. Further, if a quantization coefficient of the MPEG system is directly used, the conditional branch in the "High Efficient Encoding/decoding" can be achieved but no rule governing this is available at present. For these reasons, when considering an application to the MPEG system, there is a problem that it is difficult to handle them equally at detailed points although they are the same in principle.

[0030] Thus, in the conventional high efficient encoding/decoding system described above, there was a problem that the data utilization coefficient is lowered if address information is added to data at a data transmitting section. Further, there was another problem that data required for the format transformation was not transmitted to a data receiving section and, in addition, there was a problem that the decoding operation can not efficiently use the transmitted data when the data were transmitted in a discontinuous fashion.

[0031] Further, there was another problem that it was difficult to apply the MPEG system on the existing high efficient encoding/decoding system.

[0032] The present invention therefore seeks to provide a high efficient encoding/decoding system which is capable of facilitating the format transformation, capable of enabling the decoder to effectively use discontinuous data, and also capable of suppressing an error propagation without lowering data utilization coefficient at a data receiving section.

[0033] According to the present invention, there is provided a method of and apparatuses for encoding image data according to claims 1, 4 and 11.

[0034] For a better understanding of the present invention and many of the attendant advantages thereof reference will now be made by way examples to the accompanying drawings, wherein:

FIGURE 1 is an explanatory diagram for explaining the compression technique of the H.261 recommendation;  
FIGURE 2 is a block diagram showing the recording section of the recording/reproducing apparatus adopting the predictive encoding;  
FIGURE 3 is an explanatory diagram showing the construction of a macro block in an example of the conventional system;

FIGURE 4 is an explanatory diagram showing a data stream of recording signals;  
FIGURE 5 is a block diagram showing the decoding section (reproducing section) of the recording/reproducing apparatus;

FIGURE 6 is an explanatory diagram for explaining the recording tracks formed on a recording medium by a VCR; and

FIGURE 7 is an explanatory diagram for explaining the hierarchy of the MPEG system.

FIGURE 8 is an explanatory diagram showing the first embodiment of the high efficient encoding/decoding system;

FIGURE 9 is an explanatory diagram for explaining the data construction technique shown in FIGURE 8;

FIGURE 10 is an explanatory diagram for explaining the data construction technique shown in FIGURE 8;

FIGURE 11 is an explanatory diagram for explaining the construction of block data;  
 FIGURE 12 is an explanatory diagram for explaining the MPEG system syntax;  
 FIGURE 13 is a block diagram showing one example of an encoder;  
 FIGURE 14 is a block diagram showing one example of a decoder;  
 5 FIGURE 15 is a block diagram showing the second embodiment of the present invention;  
 FIGURE 16 is an explanatory diagram for explaining the operation of the embodiment shown in FIGURE 8;  
 FIGURE 17 is an explanatory diagram for explaining the operation of the embodiment shown in FIGURE 8;  
 FIGURE 18 is an explanatory diagram for explaining the operation of the embodiment shown in FIGURE 8;  
 FIGURE 19 is an explanatory diagram for explaining the operation of the embodiment shown in FIGURE 8;  
 10 FIGURE 20 is an explanatory diagram for explaining the operation of the embodiment shown in FIGURE 8;  
 FIGURE 21 is an explanatory diagram for explaining the operation of the embodiment shown in FIGURE 8;  
 FIGURE 22 is an explanatory diagram showing the data construction of another modification of the first embodiment of the present invention;  
 FIGURE 23 is an explanatory diagram showing a first embodiment of the high efficient encoding/decoding system  
 15 of the present invention;  
 FIGURE 24 is an explanatory diagram showing a bit stream structure (a syntax) of the MPEG system;  
 FIGURE 25 is a block diagram showing a modification of this second embodiment of the present invention;  
 FIGURE 26 is an explanatory diagram showing an input data string;  
 FIGURE 27 is an explanatory diagram showing the record format of VCR;  
 20 FIGURE 28 is a diagram for explaining extraction of intra-frame data; and  
 FIGURE 29 is a diagram for explaining the on-screen positions of reconstructed data.

[0035] A first embodiment of the present invention will be described hereinafter with reference to the drawings. FIGURE 8 is an explanatory diagram showing the first embodiment of the high efficient encoding/decoding system of the present invention. FIGURE 8 is a diagram showing a construction of encoded data. FIGURES 9 and 10 are explanatory diagrams for explaining the technique for constructing the encoded data, as shown in FIGURE 8.

[0036] Referring now to FIGURES 9 and 10, the construction of the data format used in this embodiment will be explained in detail.

[0037] As shown in FIGURE 9(a), one frame picture is composed of 768 x 480 pixels blocks in reference to a luminance signal Y as a standard. If one block is composed of the 8 x 8 pixels block of the luminance signal Y, as shown in FIGURE 9(a), the number of luminance signal blocks per one frame picture will be a 96 columns and 60 rows block (96 x 60 blocks), as shown in FIGURE 9(b). If the luminance signal Y and the color difference signals Cr and Cb are sampled at the ratio of sampling frequency 4 : 1 : 1, the number of color difference signal blocks per frame picture will be a 24 x 60 blocks for the color difference signals Cr and Cb, as shown in FIGURES 9(c) and 9(d). That is, the sizes of four luminance signal blocks Y and each of the color difference signals Cr and Cb on the picture are the same and these four luminance signal blocks Y and each of the color difference signals Cr and Cb form a small block (see FIGURE 10(a)). Here it is noted that the unit of transformation encoding is one block.

[0038] Further in the first embodiment of the present invention, a group of four small blocks forms one macro block (the definition of this macro block differs from the conventional example), as shown in FIGURE 10(b). Therefore, one frame picture is composed of 16 column small blocks and 60 row small blocks (16 x 60 small blocks), as shown in FIGURE 10(c), or 4 column macro blocks and 60 row macro blocks (4 x 60 macro blocks) when expressed in terms of macro blocks.

[0039] Referring now to FIGURE 11, the construction of block data will be explained in detail.

[0040] As described above, a small block is composed of 4 luminance blocks Y and each of the color difference blocks Cr and Cb. The luminance blocks Y1, Y2, Y3 Y4 and the color difference blocks Cr and Cb are arranged as shown in FIGURE 11(a) and transmitted in the order. FIGURE 11(b) shows the construction of the luminance blocks Y and the color difference blocks Cr and Cb in the small block, and the blocks of Y, Cr and Cb are sequentially described according to the variable length data, as shown in FIGURE 11(b). The variable length data is attached with an EOB (End of Block) signal. That is, one small block is composed of 6 continuous data illustrated in FIGURE 11(b). Further, FIGURE 11(b) illustrates an example of all compression encoded data sequentially described as variable length data. Compression encoded data may be transmitted by separating them into a low band data and a high band variable length data, as shown in FIGURE 11(c).

[0041] Each macro block (Macro B) composed of four small blocks is transmitted in the order of the sequential number, as shown in FIGURE 10(c). That is, as shown in FIGURE 11(d), in the one frame data, a data for indicating the head position of the frame is allocated at the head position of the frame and then the first, the second, ..... the nth macro block (n = 240 in FIGURE 10) data are sequentially allocated. Then, data on the head position of the following frame is allocated.

[0042] Referring now to FIGURE 8, constructions of the macro blocks and the small blocks will be explained in detail.

They are illustrated by a block of a broken line in FIGURE 8.

**[0043]** The macro block data length 51 is allocated on the head position of the macro block. The macro block data length 51 represents the data length of each macro block. If an error, etc., are occurred in a macro block, the head position of the next macro block can be known using the information of the macro block data length 51. This prevents the error occurred in a macro block from affecting other macro blocks.

**[0044]** Then, the macro block header 52 is allocated. The macro block header 52 represents in uniform fashion the entire information on the entire macro blocks such as information of its positional correspondence with a picture screen, or information for determining whether the entire macro blocks are intra-frame compression data or inter-frame compression data, etc. Four small blocks 50 are allocated following the macro block header 52.

**[0045]** In the small block 50, the quantization coefficient 53 is allocated on its head position. In the high efficient encoding, data are quantized after the DCT transformation. The quantization coefficient is for generating a quantization table which is used for this quantization processing. For instance, the quantization table is obtained by multiplying each data quantization coefficient of the quantization table. In this embodiment, the quantization coefficient 53 has the meaning as the original quantization coefficient, and also functions as a control signal for routing data into three passages which will be described later. For instance, the original quantization coefficient is expressed by 0 through 29 (= A1) using five bit information (0 through 31) as a value A of the quantization coefficient 53. If the value A of the quantization coefficient is A1, it is routed to the small block header 54 in a first passage. If the value A is 30 (= A2), it is routed to the data adjustment bit length 58 in a second passage. Further if the value A is 31 (= A3), it is routed to a third passage for directing correction.

**[0046]** Further, in the normal transmission from a broadcasting station, the passage of A = A2 or A = A3 is scarcely performed. The passage of A = A2 or A = A3 is performed mainly on recording media such as VCR, etc.

**[0047]** In the first passage of A = A1, the small block header 54 is allocated on its head position. The small block header 54 describes the header of the small block 50. This small block header 54 makes it possible to discriminate whether the compression is the intra-frame compression or the inter-frame compression. Further, the small block header 54 contains other necessary information on the small block 50. Next to the small block header 54, the data are routed either to the motion vector 18 or the intra-frame data length 56. The intra-frame data length 56 indicates the data length of the small block 50 if the small block 50 is intra-frame compression data. As the intra-frame data can be independently decoded as described above, the reconstruction efficiency in a trick play operation is promoted by reconstructing the intra-frame data in VCR, etc. That is, according to information of the intra-frame data length 56, the data format transformation to such a recording medium can be executed relatively easily. If the small block 50 is the inter-frame compression data, the data is routed from the small block header 54 to the motion vector 55. The motion vector 55 provides a vector for indicating the position of the preceding frame pixel which becomes the standard of the inter-frame compression frame (the motion vector).

**[0048]** The variable length data 57 is then allocated following the intra-frame data length 56 or the motion vector 55. The variable length data 57 is obtained by, for instance, quantizing the DCT transformation coefficient and encoding the quantized output, which is read through a zigzag tracing, to the Huffman codes (variable length encoding) according to its generating probability.

**[0049]** In the second passage of A = A2, the data adjustment bit length 58 is allocated following the quantization coefficient 53. This data adjustment bit length 58 represents the adjustment bit length for adjusting time difference resulting from the difference in encoded amount. For instance, when data for a two-hour program with the signal rate of 200 Mbps is transmitted by compressing the amount of information to 10 Mbps by encoding them with high efficiency, the compression data of the two-hour program are transmitted basically in two hours. However, as data are encoded in variable length, scenes with large amount of information transmitted and those with less amount of information transmitted occur according to a difference in compression ratio for each scene. Therefore, the encoding/decoding system is provided with a buffer. As the time adjustment is made by this buffer, an adjustment bit is scarcely needed. However, in a trick play operation by a VCR, reconstructed data may become discontinuous or only effective data may be played back. The time of period equivalent to the discontinuous portion of data cannot be covered by the buffer. For this reason, the second passage for the bit adjustment is provided. The adjustment bit length 58 represents the bit length of the discontinuous portion of the played back data. The start position of next played back data can be known by the adjustment bit length 58.

**[0050]** Then, the adjustment bit data 59 is allocated. The adjustment bit data 59 is an adjustment bit data which is inserted into the discontinuous data portion by the bit length designated by the data adjustment bit length 58. This adjustment bit data 59 keeps the transmission rate constant. When the second passage of A = A2 is executed, it becomes clear that the transmission data is the adjustment bit and therefore, the adjustment bit data 59 may be any data. However, when the adjustment bit data is allocated immediately after the variable length data 57 without adding an additional data to the variable length data 57, it is necessary to use a bit train (for instance, all "1" bit train), which does not exist, to the variable length data 57 (encoded to the Huffman codes) as the adjustment bit data 59.

**[0051]** In the third passage of A = A3, only a control signal which directs the correcting operation is transmitted. The

decoder is controlled by this control signal and the continuous data portion is corrected by, for instance, the preceding frame data.

[0052] As the transmitted data in the construction described above has the macro block length data 51, it is possible to know the head position of next macro block without decoding the variable length data 57. Further, even when an error is generated in a prescribed macro block, the error is completed in that macro block and other macro blocks are not affected by the error. Following this macro block length data 51, next macro block header 52 is transmitted. By comparing with the position on the picture by the macro block header 52, it becomes possible to playback the picture from decoded data even in the trick play operation by a VCR. Further, address information is not transmitted in unit of macro block, thus promoting data utilization coefficient more than a conventional system.

[0053] Then, four small blocks 50 are transmitted. Each of the small block 50 is provided with the quantization coefficient 53 at its head position and in the first passage of  $A = A1$ , it is provided with the small block header 54. Data transmitted from a broadcasting station are in most case those data composed through the first passage of  $A = A1$ . If the small block 50 is intra-frame data, the intra-frame data length 56 is transmitted, while if it is inter-frame data, the motion vector 55 is transmitted. Then, the variable length data 57 is transmitted. Thus, each small block 50 has the small block header 54 in addition to the variable length data 57 and the error propagation is restricted. In the trick play operation by a VCR, playback data become discontinuous in unit of relatively short data. However, each small block 50 is provided with the small block header 54 to make unit of decoding small and improve the playback efficiency (decoding efficiency).

[0054] By the way, intra-frame data are decodable independently. Therefore, on a VCR, etc., intra-frame data may be reconstructed through the format transformation of transmitted data. In this embodiment, the intra-frame data length is transmitted by the intra-frame data length 56. This makes the format transformation easy on a VCR, etc. Further, it is possible to know that the intra-frame portion is normally played back without decoding data and the data end point in the trick play operation by a VCR.

[0055] Here, it is assumed the data composed by the first passage of  $A = A1$  are transmitted from a broadcasting station to a VCR where they are transformed into a recording format for the trick play operation in the VCR and are recorded on a recording medium. In this case, the first passage is controlled in the VCR by changing the value  $A$  of the quantization coefficient 53. FIGURES 12 and 13 are explanatory diagrams for explaining this operation.

[0056] Now, data recorded on the hatched section only are played back in the trick play operation by a VCR as shown in FIGURE 6. Further, when the played back signals of this hatched section are decoded to variable length codes, data which can be restored to the original picture signal using independent data are only intra-frame compression data. On the contrary, in case of inter-frame compression data, differential (predictive) signals only are decoded and therefore, in order to obtain the original picture signals, the preceding frame data are required. Therefore, only the intra-frame compression data out of the played back signals are restored to the original picture and other data become unnecessary.

[0057] Now, it is assumed that the picture of the hatched section illustrated in FIGURE 12 is restored by intra-frame compression data which are played back in the trick play operation and the hatched section corresponds to the small blocks. That is, the reconstructed data of each small block of the first, the 7th, the 21st, ..... macro blocks of the prescribed frame can be decoded. In this case, therefore, data of each small block of the first, the 7th, the 14th, ..... macro blocks only are recorded in the VCR. That is, following the data at the head position of the frame (FIGURE 11(d)), the first small block data of the first macro block are stored in the prescribed frame. That is, the value  $A$  of the quantization coefficient 53 of the first small block is  $A1$  and the data transmitted through the first passage of  $A = A1$  are recorded. The value  $A$  of the quantization coefficient 53 from the second small block to the fourth small block of the first macro block is  $A3$ . Similarly, the third passage of  $A = A3$  is selected for all small blocks of the second macro block through the 16th macro block. In this case, only the control signal directing correction is stored. The first small block of the 17th macro block selects the third passage of  $A = A3$  and the second small block of the 17th macro block selects the first passage of  $A = A1$ . Hereafter, in the similar manner the variable length data for the portion corresponding to the hatched section in FIGURE 12 are recorded and the control signal directing correction is recorded for other portions.

[0058] When the third passage of  $A = A3$  is selected, the amount of transmission data is decreased. As a result, after transmitting the 240th macro block data, a certain time to spare is produced. So, the second passage of  $A = A2$  is selected by changing the quantization coefficient 53 for time adjustment. FIGURES 14 through 16 are explanatory diagrams for explaining this second passage of  $A = A2$ .

[0059] FIGURE 14 corresponding to one frame data and the hatched section illustrates the adjusting bit by the second passage of  $A = A2$ . In FIGURE 14, after transmitting the 240th macro block data, the quantization coefficient 53 was set at  $A = A2$ . Following the quantization coefficient 53, the data adjustment bit length 58 is transmitted and then, the adjustment bit data 59 are transmitted. The adjustment bit data 59 are inserted for every unit of construction of the data packet and at the same time, the head position of next frame is cleared by the data adjustment bit length 58. FIGURE 15 illustrates the data format recorded on a recording medium. In FIGURES 14 and 15, the adjustment bit is transmitted at the last of the frame, however, it may be transmitted by inserting between the macro blocks as shown in FIGURE 16.



[0060] The intra-frame data, as illustrated by the hatched section in FIGURE 13, are decoded and compared with the positions on the screen by the macro block header 52. Further, as to other portions, the control signal directing correction is first played back and then the picture is played back by using the control signal from the preceding frame data.

[0061] Thus, according to the data construction of this embodiment, the frame head position data only are transmitted as address information, promoting data utilization coefficient. Further, the data transmitted are compared with the positions on the screen by the macro block header 52 and the data utilization coefficient can be promoted more than the conventional system. In addition, as the small block, which is unit of decoding, is a combination of a header and variable length codes, the playback efficiency can be promoted when played back data are discontinuous. Furthermore, the data length of intra-frame data is transmitted and this will facilitate the format transformation in VCR, etc. Further, the second passage for inserting the adjustment bit for time adjustment and the third passage for directing correction are selected according to the recording state in addition to the first passage for normal data transmission. This makes it possible to restore a picture from played back discontinuous data even when played back data become discontinuous. Thus, very effective data format is obtained on such recording media with severe condition for compression efficiency in television broadcasting, etc. and generating data errors and discontinuous playback as VCR.

[0062] Further, although the construction of encoded data was explained in unit of small block in this embodiment, data may be constructed in unit of block, and the construction, as shown in FIGURE 8, may be separated in each independent small block construction. In this case, the macro block length data 51, the macro block header 52 and the small block 50 will become unit of transmission, respectively. Further, the intra-frame data length 56 is not required in this case.

[0063] FIGURE 17 is a block diagram showing an encoder for realizing the data construction in FIGURE 8.

[0064] A preprocessor 61 samples an input signal and applies it, in the unit of small block as shown in FIGURES 9 and 10, to a subtracter 12 and a switch 62. The switch 62 is supplied with the output from the subtracter 12 and under the control of an intra-frame/inter-frame identifier 63, applies one of two inputs to a DCT unit 13. The intra-frame/inter-frame identifier 63 is supplied with an external control signal and a motion signal from a motion detector 26 which is described later and controls the switch. That is, if the intra-frame compression is directed by the external control signal or if the motion is larger than a prescribed value, the switch 62 is forced by the intra-frame/inter-frame identifier 63 to select the output of the preprocessor 61 for executing the intra-frame compression.

[0065] The DCT unit 13 is applied with signals in unit of block and transforms the input signals into frequency components through the 8 x 8 two dimensional DCT (Digital Cosine Transformation) processing. The output of the DCT unit 13 is applied to a quantizer 15. The quantizer 15 is applied with a quantization coefficient from a rate controller 64 and reduces the redundancy of one block signal by requantizing the DCT output. The rate controller 64 generates a quantization coefficient based on a transformation coefficient from the DCT unit 13 and data from a rate controller 67. The quantized data from the quantizer 15 is applied to a variable length encoder 16 and an inverse quantizer 21.

[0066] By the way, when performing the inter-frame compression, it is necessary to compensate the motion of the picture. The quantized output is applied to the inverse quantizer 21. Receiving a quantization coefficient from the rate controller 64, the inverse quantizer 21 inverse quantizes the quantized output and applies it to an inverse DCT unit 22. The inverse DCT unit 22 executes the inverse DCT processing on the output of the inverse quantizer 21 to restore it to the original video signal; and applies it to an adder 23. In this case, as the output of the extractor 12 is differential information, the output of the inverse DCT unit 22 is also differential information. The output of the adder 23 is fed back through an inter-frame predictor 68 and a switch 69. The adder 23 plays back and then supplies the current frame data by adding a differential data to the preceding frame data.

[0067] The inter-frame predictor 68 is also applied with a motion vector from a motion detector 26. The motion detector 26 receives an input signal from the preprocessor 61 and obtains a motion vector. The inter-frame predictor 68 compensates the output of the adder 23 by the motion vector and applies it to a subtracter 12 and also, to the adder 23 through the switch 69. The switch 69 is controlled by the intra-frame/inter-frame identifier 63. Thus, the motion compensated preceding frame data are supplied to the subtracter 12.

[0068] The variable length encoder 16, for instance, encodes the quantized output to Huffman codes and applies the encoded output to a buffer 65 and a data length counter 66. The buffer 65 accumulates variable length codes and applies them to a multiplexer (hereinafter referred to as MPX) 70. The rate controller 67 monitors the amount of output data from the variable length encoder 16 according to the cumulative state of the buffer 65 and based on the monitoring result, controls the variable length encoder 16 to restrict the amount of output data and also, controls the rate controller 64 to change the quantization coefficient of the quantizer 15, thus adjusting the amount of output data. A data length adjuster 74, under the control of the rate controller 67, generates adjustment bit data and applies them to the buffer 65.

[0069] The data length counter 66 counts data lengths of all blocks from the output of the variable length encoder 16 and further, obtains data lengths of small blocks by accumulating block data lengths and applies them to the MPX 70 and a data length counter 71. The data length counter 71 accumulates data lengths of 4 small blocks from the data length counter 66 and further, obtains macro block data lengths by adding the header data lengths and applies them

to the MPX 70. A header signal generator 72 generates the header of the small blocks and the macro blocks. The header signal generator 72 generates, for instance, a header signal which indicates whether data are intra-frame data or inter-frame data and applies it to the MPX 70. The MPX 70, under the control of a controller 73, transmits the data which are applied in the data arrangement illustrated in FIGURE 8.

5 **[0070]** Next, the operation of the encoder in the construction as described above will be explained.

**[0071]** Input signals are preprocessed in the preprocessor 61 and are applied to the subtracter 12 and the switch 62 in unit of block. When performing the intra-frame compression, the switch 62, under the control of the intra-frame/inter-frame identifier 63, selects the output of the preprocessor 61. The block data from the preprocessor 61 are applied to the DCT unit 13 for execution of the two dimensional DCT processing. The output of the DCT unit 13 is quantized in the quantizer 15 and transformed to variable length codes in the variable length encoder 16. These variable length codes are accumulated in the buffer 65. Amount of data is controlled at a constant level (the rate control) according to the state of variable length data accumulated in the buffer 65. That is, the rate controller 67 specifies the upper limit of data lengths by controlling the variable length encoder 16. Further, the rate controller 64 controls the quantization coefficient based on the outputs of the rate controller 67 and the DCT transformation coefficient and adjusts data lengths.

15 **[0072]** When performing the inter-frame compression, the output of the preprocessor 61 is applied to the subtracter 12. The subtracter 12 is supplied with the motion compensated preceding frame data as a predictive value and the subtracter 12 applies a differential signal of two input signals to the DCT unit 13 through the switch 62. The output of the quantizer 15 is inverse-quantized in the inverse quantizer 21 and further, inverse DCT processed in an inverse DCT unit 22 and restored to the original data before inputting to the DCT unit 13 and applied to an adder 23. The output of the adder 23 is applied to an inter-frame predictor 68, which obtains predictive value by the motion vector from the motion detector 26 and applies it to the subtracter 12 and also, feeds it back to the adder 23 through a switch 69. That is, the adder 23 obtains differential data (local decoded data) partially and the inter-frame predictor 68 obtains a predictive value from this differential data and the motion vector. Further, the intra-frame/inter-frame identifier 63 controls whether the intra-frame or inter-frame compression is to be performed by an external control signal and the motion detecting signal.

**[0073]** Thus, the variable length encoder 16 obtains inter-frame variable length data and intra-frame variable length data, the rate controller 64 obtains a quantization coefficient, and the motion detector 26 obtains a motion vector and applies it to the MPX 70.

30 **[0074]** Further, the data length counter 66 counts block data lengths from variable length codes, obtains data lengths of small blocks by emulating block data lengths, and applies them to the MPX 70. The data length counter 71 obtains the macro block data length by emulating the small block data lengths and applies it to the MPX 70. Further, the header signal generator 72 generates the macro block and small block headers and applies them to the MPX 70. Further, when performing the intra-frame compression, the output of the data length counter 66 will be intra-frame data length.

35 **[0075]** The MPX 70, under the control of the controller 73, selects input data, reconstructs them in order and outputs them. This will make it possible to arrange data in the data format using  $A = A1$ , as shown in FIGURE 8, and transmits them.

**[0076]** Further, the data lengths of the macro block header and the small block header are not applied to the data length counters 66 and 71. The macro block data length 51 and the intra-frame data length 56 may or may not contain the header data length in the format, as shown in FIGURE 8. As multiplexing timings of all data are decided by the controller 73, the header data length can be obtained easily by the controller 53. Therefore, when the header data length is contained in the macro block data length 51 and the intra-frame data length 56, it is only required to supply data from the controller 53 to the data length counters 66 and 71.

45 **[0077]** The passages of  $A = A2$  and  $A = A3$  illustrated in FIGURE 8 are used to such recording media as VCR, etc. When selecting these passages, the value  $A$  of the quantization coefficient from the rate controller 64 should be made  $A2$  or  $A3$  by the rate controller 67. If  $A = A2$ , a data length adjuster 74, under the control of the rate controller 67, applies adjustment bit data for data adjustment bit length to the MPX 70 through the buffer 65. As a result, the data formats shown in FIGURES 15 and 16 are obtained. If  $A = A3$ , the controller 73 outputs a control signal for directing corrections from the MPX 70.

50 **[0078]** Further, the second passage of  $A = A2$  may be adopted in the data transmission from a broadcasting station. For instance, if a vacancy is generated in the data transmission for convenience of packet and the buffer 65 becomes underflow, the rate controller 67 controls the data length adjuster 74 to generate a prescribed bit length adjusting bit.

**[0079]** FIGURE 18 is a block diagram showing a decoder to decode transmission data in the data format illustrated in FIGURE 8.

55 **[0080]** A header extractor 81 of the decoder extracts the macro block header and the small header from encoded data. The output of the header extractor 81 is applied to a variable length decoder 82, a controller 83, a quantization coefficient unit 84 and a motion vector extractor 85. The variable length decoder 82 decodes the received data in variable length and applies it to a buffer 86. The controller 83 is applied with intra-frame data length, macro block data

length and adjustment bit length data. The controller 83 controls the variable length decoder 8 using these data to prevent propagation of error and confirms if input block data are proper. Further, the controller 83 is applied with a header signal and controls a switch 89 which is described later by discriminating whether data are intra-frame compression data or inter-frame compression data.

**[0081]** The output of the buffer 86 is applied to inverse quantizer 87. The quantization coefficient unit 84 extracts a quantization coefficient from the output of the header extractor 81 and applies it to the inverse quantizer 87. The inverse quantizer 87 inverse-quantizes the variable length decoded output using the quantization coefficient and applies it to an inverse DCT unit 88. The inverse DCT unit 88 restores the inverse quantized output to the original data by performing the inverse DCT processing and applies it to the switch 89 and an adder 90. If the controller 83 indicates that the input data is the intra-frame compression data, the switch 89 selects the decoded data from the inverse DCT unit 88 and applies it to a memory 92.

**[0082]** The motion vector extractor 85 extracts a motion vector from the output of the header extractor 81 and applies it to a predictive decoder 91. The predictive decoder 91 is applied with the preceding frame decoded data from the memory 92 and performs the motion compensation of the preceding frame data according to the motion vector and applies the motion compensated preceding frame data to an adder 90. The adder 90 decodes the inter-frame compressed data by adding the output of the predictive decoder 91 and the output of the inverse DCT unit 88 and applies the decoded data to the switch 89. If inter-frame compression data are input, the switch 89, under the control of the controller 83, selects the output of the adder 90 and applies it to the memory 92.

**[0083]** In this first embodiment the quantization coefficient unit 84 discriminates a value of a quantization coefficient. That is, if  $A = A1$ , the quantization coefficient unit 84 applies the quantization coefficient directly to the inverse quantizer 87, while if  $A = A2$ , the quantization coefficient unit 84 outputs a signal indicating that the input data is the adjustment bit to the controller 83 to grasp the adjustment bit length. As a result, the controller 83 stops the decoding operation of the variable length decoder 82. After suspending the decoding for the period when data in the data length defined by the adjustment bit length is input, the controller 83 issues an instruction to resume the decoding.

**[0084]** Further, if  $A = A3$ , the quantization coefficient unit 84 gives a correcting instruction to a buffer readout indicator 94. When given with this correcting instruction, the buffer readout indicator 94 controls the buffer 86 to suspend the data readout and also, controls a memory controller 93 to inhibit write to a memory 92. As a result, the data stored in the memory 92 are not updated by the decoded data of the block or the small block for which the correcting instruction is generated. That is, for these blocks, the preceding frame decoded data are left without being updated. Further, even when the variable length decoding error is generated, a request for correcting instruction is generated to the buffer readout indicator 94 from the variable length decoder 82.

**[0085]** Referring now to the timing charts shown in FIGURES 19 and 20, the operation of the decoder in the construction as described above will be explained in detail. FIGURE 19 is for explaining the second passage of  $A = A2$  and FIGURE 20 is for explaining the third passage of  $A = A3$ . In FIGURES 19 and 20, H indicates the header.

**[0086]** Data applied to the decoder is applied to the header extractor 81 for extracting a header signal. The variable length decoder 82 decodes the output of the header extractor 81 in variable length and applies it to the buffer 86. The decoded data is made to a fixed length in the buffer 86 and is applied to the inverse quantizer 87. The quantization coefficient unit 84 extracts a quantization coefficient and supplies it to the inverse quantizer 87. The inverse quantizer inversely quantizes the variable length decoded data using this quantization coefficient. The inverse DCT unit decodes the inverse quantized output to the original data by performing the inverse DCT processing on the inverse quantized output. If the input data is intra-frame compression data, the switch 89 selects the output of the inverse DCT unit 88 by the controller 83 and the decoded output from the inverse DCT unit 88 is stored in the memory 92 through the switch 89. If the input data is inter-frame compression data, the output of the inverse DCT unit 88 is applied to the adder 90 and added with the motion compensated preceding frame data. As a result, the decoded output of the inter-frame compression data is obtained and the decoded output is stored in the memory 92 through the switch 89.

**[0087]** Now, it is assumed that the input data illustrated in FIGURE 19(b) is input. As shown in FIGURE 19(b), the  $n$ th, the  $(n+1)$ th and the  $(n+4)$ th macro blocks are encoded data, that is, they are the data resulted from the first passage of  $A = A1$  in the encoding, and the  $(n+2)$ th and the  $(n+3)$ th macro blocks are adjustment bit data, that is, they are the data resulted from the second passage of  $A = A2$  in the encoding. When detecting that the quantization coefficient of the  $n$ th macro block data is  $A = A1$  from the output of the header extractor 81, the quantization coefficient unit 84 instructs the buffer readout indicator 94 to output the decoded data from the variable length decoder 82 to the inverse quantizer 87. The buffer readout pulse illustrated in FIGURE 19(c) is generated from the buffer readout indicator 94 and the decoded output illustrated in FIGURE 19(c) is applied to the inverse quantizer 87.

**[0088]** Here, if the  $(n+2)$ th macro block data is input, the quantization coefficient unit 84 detects the data is that data resulted from the second passage of  $A = A2$  and outputs as signal representing that the input data is the adjustment bit to the controller 83. The controller 83 directs the variable decoder 82 to suspend the decoding operation as shown in FIGURE 19(c). The buffer readout pulse is not generated from the buffer readout indicator 94 as shown in FIGURE 19(d) and no data is applied to the inverse quantizer 87.

[0089] Then, if the (n+4)th macro block data is input, the decoding operation is resumed and the decoded data of (n+4)th macro block is written into the memory 92. Thus, the input intra-frame data is surely decoded.

[0090] Here it is assumed that the input data train illustrated in FIGURE 20(b) is input. As shown in FIGURE 20(b), the encoded data of the nth, the (n+1)th and the (n+3)th are transmitted while the (n+2)th, the (n+4)th and the (n+5)th macro block data are not transmitted.

[0091] If the (n+2)th macro block data is input, the quantization coefficient unit 84 detects from the output of the head extractor 81 that the data is that resulted from the third passage of  $A = A3$  and applies the correcting instruction to the buffer readout indicator 94. The buffer readout indicator 94 gives an instruction to the buffer 86 to suspend the readout of the decoded output. Further, the buffer readout indicator 94 also gives an instruction to the memory controller 93 to inhibit updating of the address of the memory 92 corresponding to the (n+2)th macro block. Thus, it becomes possible to correct the portion corresponding to the adjustment bit by the preceding frame data.

[0092] FIGURE 21 is an explanatory diagram showing the data construction of a modification of the first embodiment of the present invention. In FIGURE 21, the same elements as in FIGURE 8 are assigned with the same reference numerals and the explanations are eliminated.

[0093] The small block 100 of this embodiment differs from the embodiment, as shown in FIGURE 8, in that three passages of  $A = A1$ ,  $A = A2$  and  $A = A3$  are changed to two passages of  $A = A1$  and  $A = A3$  and the adjustment bit 101 is added after the variable length data 57. The adjustment bit 1021 corresponds to the second passage of  $A = A2$  illustrated in FIGURE 8.

[0094] In the data format in the construction described above, data which does not exist as the Huffman code (for instance, an all "1" data train) is added as the adjustment bit 101. As a result, the adjustment bit 101 is processed as a data which cannot be decoded. After all, this bit 101 serves as the adjustment bit as in the second passage of  $A = A2$  in FIGURE 8.

[0095] FIGURE 22 is an explanatory diagram showing the data construction of another modification of the first embodiment of the present invention. In FIGURE 22, the same element as in FIGURE 8 are assigned with the same reference numerals and the explanations are eliminated.

[0096] In this embodiment, the basic quantization coefficient 111 of the macro block is allocated in front of the small block 110. If the value of the basic quantization coefficient is  $A'$  and a difference between  $A'$  and the basic quantization coefficient of each small block is  $A''$ ,  $A' + A''$  becomes the quantization coefficient B of the small block 110. At the head position of the small block, the coefficient compensator 112 of the quantization coefficient of the value  $A''$  is allocated. If the basic quantization coefficient value  $A'$  of the quantization coefficient 111 is  $A1'$ , it is routed to the quantization coefficient 112, if it is  $A' = A2'$ , it is routed to the quantization coefficient 113. The quantization coefficient 113 is a data of quantization coefficient B of the small block. When the value of the quantization coefficient 113 is  $B1$ ,  $B2$  or  $B3$ , the passage is the same as the passage in case of  $A1$ ,  $A2$  or  $A3$  illustrated in FIGURE 8.

[0097] According to the data format in the construction as described above, the passage is performed with the basic quantization coefficient value  $A'$ . That is, if data are reconstructed discontinuously, the small block quantization coefficient B cannot be obtained by the basic quantization coefficient  $A'$  and a difference  $A''$ . Therefore, in such a case, it is made possible to transmit the quantization coefficient B by the second passage of  $A' = A2'$ . Other operations and effects are the same as those in the embodiment in FIGURE 8.

[0098] As described above, the first embodiment of the present invention can provide an extremely preferable high efficient encoding/decoding system which is capable of facilitating the format conversion, effective decoding of data using discontinuous data and restricting propagation of errors without lowering data utilization coefficient.

[0099] Referring now to FIGURES 23 through 29, a second embodiment of the present invention will be described in detail. FIGURE 23 is an explanatory diagram showing a first embodiment of the high efficient encoding/decoding system of the present invention. FIGURE 23 shows the encoded data structure. FIGURES 9 and 10 in the first embodiment will be again used for explaining the technique for constructing encoded data shown in FIGURE 23. Further, FIGURE 24 is an explanatory diagram showing a bit stream structure (a syntax) of the MPEG system.

[0100] First, only the portion of the syntax of the MPEG system (Reference Literature 1 "International Standard for Multimedia Encoding" by Hiroshi Yasuda (published from Maruzen) shown in FIGURE 24, which relates to this embodiment of the present invention will be explained. Further, abbreviations used in the figure are not those used in the document of the standard plan but are peculiar to Literature 1.

[0101] As shown in FIGURE 24, a synchronizing code (hereinafter referred to as the start code) SSC (sequence start code) showing the start of the video sequence layer is allocated at the head position of the layer. Thereafter, HS, VS, PAR, ....., UD are sequentially allocated and one or more GOPs (GOP layer data) are allocated and lastly, the synchronizing code SED (sequence end code) showing the end of one or more sequences is allocated.

[0102] The start code GSC (group start code) showing the start of GOP is allocated at the head position of the GOP layer, followed by TC, CT, ....., UD and lastly, the data PICT (Picture Layer Data) composed of one or more I pictures and zero or more pictures other than I picture. The start code PSC (picture start code) showing the start of the picture layer is allocated at the head position of the picture layer, followed by TR, PCT ....., UD and lastly the data SLICE (slice

layer data) of one or more slice layers. The start code SSC (slice start code) showing the start of the slice layer is allocated at the head position of the slice layer, followed by QS, EBS, EIS and lastly, the data MB (macro block layer data) of one or more macro block layers.

[0103] The macro block layer is routed to MBI (macro block address increment), MB STUFF (macro block stuffing) or MB ESCAPE (macro block escape) according to the conditions established for each encoded picture. In the MPEG system, MB which is not required for transmission by the inter-frame encoding is skipped without being transmitted as in a case of two still pictures. The MBI indicates the number of these skips. The MBI normally represents the progress from MB which was transmitted in advance. The MBI at the head position of the SLICE represents the horizontal position in the screen by the number of macro blocks. The on-screen horizontal and vertical positions of the SLICE layer can be grasped by these two information. The number of skips which can be expressed by the MBI is up to 33 and for the number of skips above 33, the MB ESC that is equivalent to the skip MB of 33 is used. The MB STUFF is a dummy code that is used for rate control.

[0104] TABLE 2 as shown below represents start codes. As represented in TABLE 2, the start codes SSC, GSC, PSC and SSC are special codes comprising plural bits and each code contains a bit pattern which can be discriminated from other data. These codes, when detected, represent the head position of the video sequence layer, GOP layer, picture layer or slice layer. Further, the start code (SSC) of each SLICE contains the vertical position representing the on-screen vertical block position, as represented in TABLE 2:

TABLE 2

START CODE	HEXADECIMAL
picture start code	00000100
slice start codes (including slice vertical positions)	00000101
	through
	000001AF
reserved	000001B0
reserved	000001B1
user data start code	000001B2
sequence start code	000001B3
sequence error code	000001B4
extension start code	000001B5
sequence end code	000001B7
group start code	000001B8
system start codes	000001B9
	through
	000001FF

[0105] Here the construction of the data format used in this second embodiment are the same as those, as shown in FIGURES 9 and 10 in the first embodiment. Thus explanations about the construction of the data format in this second embodiment will be omitted herewith.

[0106] Further, as illustrated in FIGURE 3(b), a group of four small blocks forms one macro block (the definition of this macro block differs from the conventional example). Therefore, one frame picture is composed of 16 horizontal small blocks x 60 vertical small blocks as illustrated in FIGURE 3 (c) or 4 horizontal macro blocks x 60 vertical macro blocks when expressed in terms of macro blocks.

[0107] Although the on-screen positions of macro blocks have been fixed in FIGURE 10(c), the macro block can be started from any position and it is also not needed to fix its length. For instance, the first through the 16th macro blocks in FIGURE 10(c) can be reconstructed to one macro block, or the first through the 32nd macro blocks can be reconstructed to one macro block. Further, in the MPEG system, the standard sampling frequency ratio of Y : Cr : Cb is 4 : 2 : 1. However, it is explained as 4 : 1 : 1 in this embodiment for convenience of the explanation.

[0108] The construction of block data of the second embodiment is also the same as those of the first embodiment. Thus explanations about the construction of block data of the second embodiment will be omitted herewith.

[0109] The constructions of the macro blocks and the small blocks are explained with reference to FIGURE 23. They are illustrated by enclosing with the broken line in FIGURE 23.

[0110] A macro block start code 110 is allocated at the head position of a macro block. This start code 110 represents the data position of each macro block. If an error, etc. occurred in any macro block, the head position of next macro block can be known by detecting this start code 110. Thus, propagation of the error occurred in that macro block is

prevented.

[0111] Then, a macro block header 52 is allocated. The macro block header 52 represents the consolidated information of the entire macro blocks, and also represents, for instance, additional information, etc. Following the macro block header 52, more than one small blocks 50 are allocated.

[0112] In the small block 50, a quantization coefficient 53 is first allocated. In the high efficient encoding, data are quantized after the DCT transformation. The quantization coefficient 53 is a coefficient required for generating a quantizing table which is used for the quantizing processing. After allocating the quantization coefficient 53, data are routed to any one of first through fourth passages according to conditions that will be described later.

[0113] In the first passage, an MBI 104 is first allocated and then followed by a small block header 103. The MBI of the small block 50 at the head position of a macro block represents the horizontal position of the macro block, while an MBI other than this MBI represents a difference in addresses from the small block transmitted in advance. For instance, if a predictive error becomes 0 and the small block 50 requiring no transmission occurred as in a case where two still pictures were inter-frame encoded, only the predictive error being 0 is transmitted and this small block 50 is skipped. An MBI other than that at the head position of a macro block represents the number of small blocks 50 skipped by the fourth passage, as described later. The small block header 103 describes the header of the small block 50. By this small block header 103 it becomes possible to discriminate whether the compression is the intra-frame compression or the inter-frame compression and whether it is field or frame. Further, the small block header 103 contains other required information relative to the small block 50.

[0114] Following the small block header 103, the operation is routed to either a motion vector 55 or an intra-frame data length 56. The intra-frame data length 56 indicates the data length of the small block 50 when the small block 50 is the intra-frame compression data. As described above, it is possible to decode the intra-frame data independently and reconstruction efficiency in a trick play operation can be improved when the intra-frame data are reconstructed. That is, according to the information of the intra-frame data length 56, a data format change to such a recording medium can be made relatively easily and a variable length signal can be extracted without decoding in a playback operation. When the small block 50 is inter-frame compression data, the operation is routed from the small block header 103 to the motion vector 55. The motion vector 55 gives a vector (a motion vector) representing the pixel positions of the preceding frame, which becomes the inter-frame compression frame standard.

[0115] Following the intra-frame data length 56 or the motion vector 55, the variable length data 57 is allocated. The variable length data 57 is obtained by, for instance, quantizing the DCT transformation coefficient and encoding the quantized output, which is read through the zigzag tracing, to the Huffman codes (variable length encoding) according to its generating probability.

[0116] In the second passage, the MB ESCAPE 102 is allocated. This MB ESCAPE 102 represents that there are the prescribed number of small blocks to be skipped (hereinafter referred to as the skip SB). When this embodiment is applied, the number of skips that can be expressed by the MBI 104 is 33, and thus the MB ESCAPE 102 indicates the 33 skips. If, for instance, the number of skips is 34, the MB ESCAPE 102 and the MBI 104 are a and if the number of skips is 68, the MB ESCAPE 102 is 2 (or it indicates 66 skips SB) and the MBI 104 is also 2. It has been intended to decrease data volume by adopting this MB ESCAPE 102.

[0117] In the third passage, the MB STUFF 59 for data length adjustment is allocated. The MB STUFF 59 is data length adjustment bit data for maintaining a transmission rate constant. Further, information on data length of the data length adjustment bit may be included in the MB STUFF 59.

[0118] In the fourth passage, only the SKIP 101 representing a correction instruction is transmitted. The SKIP 101 does not represent that a differential value is zero as in the MB ESCAPE 102 in the second passage, but represents that data were lost. Discontinuous portion of data is corrected by, for instance, preceding frame data by controlling a decoder using the SKIP 101.

[0119] An encoder for realizing the data construction of FIGURE 23 is the same as that of the first embodiment, as shown in FIGURE 17. Thus explanations about the encoder of the FIGURE 23 will be omitted herewith.

[0120] Further, in this second embodiment when performing the intra-frame compression in relation to FIGURE 17, the output of the data length counter 66 will be intra-frame data length. A data length adjuster 74, under the control by the rate controller 67, supplies the MB STUFF 59 representing an adjusting bit data for a data adjusting bit length to the MPX 70 through the buffer 65.

[0121] The MPX 70, under the control by the controller 73, selects input data, and then sequentially outputs the selected input data. In this case, the controller 73 generates the MBI 104, MB ESCAPE 102, MB STUFF 59 or SKIP 101 according to the first through the fourth passage, respectively, and then outputs them through the MPX 70. For instance, in case of the fourth passage, the controller 73 outputs the SKIP 101 representing a correction instruction through the MPX 70. Further, in the MPEG system, the increment value 1 through 33 of the MBAT, MB ESCAPE and MB STUFF are discriminated by different codes in the same table as represented by the macro block address increment VLC (see Literature 1) in TABLE 3. Further, although the SKIP 101 has not been adopted by the MPEG system, by making the number of skips that can be expressed by the MB ESCAPE 32, the code for the increment value 33 listed

in TABLE 3 may be assigned as the SKIP 101.

TABLE 3

MACRO BLOCK ADDRESS INCREMENT VLC CODE	INCREMENT VALUE	MACRO BLOCK ADDRESS INCREMENT VLC CODE	INCREMENT VALUE
1	1	0000 0101 10	17
011	2	0000 0101 01	18
010	3	0000 0101 00	19
0011	4	0000 0100 11	20
0010	5	0000 0100 10	21
0001 1	6	0000 0100 011	22
0001 0	7	0000 0100 010	23
0000 111	8	0000 0100 001	24
0000 110	9	0000 0100 000	25
0000 1011	10	0000 0011 111	26
0000 1010	11	0000 0011 110	27
0000 1001	12	0000 0011 101	28
0000 1000	13	0000 0011 100	29
0000 0111	14	0000 0011 011	30
0000 0110	15	0000 0011 010	31
0000 0101 11	16	0000 0011 001	32
		0000 0011 000	33
		0000 0001 111	macroblock stuffing
		0000 0001 000	macroblock escape

[0122] Using Codes 104, 102, 59 and 101 generated by the controller 73, it is possible to allocate and transmit data in a data format using any one of the passages 1 through 4, as shown in FIGURE 23. Further, the fourth passage, as shown in FIGURE 23, is adopted in such recording media as VCR, etc.

[0123] A decoder for decoding data transmitted in the data format, as shown in FIGURE 23, is the same as that of the first embodiment as shown in FIGURE 18. Thus explanations about the decoder, as shown in the FIGURE 23, will be omitted herewith.

[0124] In this second embodiment, the header extractor 81, as shown in FIGURE 18, gives a quantization coefficient directly to the inverse quantizer 87 in case of the first and the second passages. In case of the third passage, the header extractor 81 supplies a signal indicating that the input data is an adjusting bit to the controller 83 for grasping the adjusting bit length. As a result, the controller 83 disables the decoding operation of the variable length decoder 82. After suspending the decoding for a period when adjusting data are input, the controller 83 gives an instruction to resume the decoding.

[0125] Further, in case of the fourth passage, the controller 83 gives a correction instruction to the buffer readout indicator 94. When given with this correction instruction, the buffer readout indicator 94 controls the buffer 86 to suspend the data readout and also, controls a memory controller 93 to inhibit write to a memory 92. As a result, the data stored in the memory 92 are not updated by the decoded data of the block or the small block for which the correction instruction was generated. That is, the preceding frame decoded data are left without being updated for these blocks. Further, even when the variable length decoding error is generated, a request for the correction instruction is generated to the buffer readout indicator 9 from the variable length decoder 82.

[0126] Thus, in this second embodiment it is possible to know the head positions of macro blocks and grasp the on-screen positions of macro blocks without necessity for macro block data length information by adopting start codes representing the head positions of respective macro blocks. Further, it is also possible to transmit a correction instruction by the SKIP. As start codes, MBI, MB ECAPE and MB STUFF have been adopted, when applied to the MPEG system, the format transformation at the receiving section is facilitated, the decoding effectively using discontinuous data is enabled and furthermore, error propagation can be suppressed without deteriorating the data utilization efficiency.

[0127] FIGURE 25 is a block diagram showing a modification of this second embodiment of the present invention. This modification illustrates an example of the application to video cassette recorders (VCR).

**[0128]** An input signal is given to a frame head position detector 200. The frame head position detector 200 detects a macro block at the frame head position and supplies the macro block to a macro block head position detector 201. Further, in the MPEG system, the SLICE head position at the frame head position may not be detected unless both of the frame head position and the SLICE head position are detected. The macro block head position detector 201, detecting the macro block start code contained in an input signal, detects the head position of the macro block and supplies it to a macro block on-screen position counter 202. The macro block on-screen position counter 202 obtains the on-screen vertical position of a macro block from its start code, and simultaneously obtains its on-screen horizontal position from information of the MBAI and supplies the on-screen positional correspondence information to a packeter 204 and an address pointer adder 203.

**[0129]** The address pointer adder 203 outputs the information on the on-screen positions of the macro blocks or the small blocks as addresses and also outputs the information on the head positions in the packets of respective macro blocks. The packeter 204 adds address information and macro block head position information to input data, packets them in a prescribed unit and supplies them to an error correction code adder 206.

**[0130]** The error correction code adder 206 supplies the output of the packeter 204 with an error correction code added to a multiplexer 207. A SYNC/ID generator 205 generates sync signal (SYNC) and ID signal and gives them to the multiplexer 207. The multiplexer 207 multiplexes SYNC/CD signals over packet data which are added with an error correction code and gives them to a recording modulator 208. The recording modulator 208 modulates input data to signals suited to recording and gives the modulated signals to a recording head 210 via a recording amplifier 209 for recording on a tape 211.

**[0131]** In the playback section, a playback head 212 plays back the data recorded on the tape 211 and gives the played back data to an equalizing/synchronizing/demodulating unit 214 through a playback amplifier 213. The equalizing/synchronizing/demodulating unit 214 equalizes the waveform of the played back data, extracts sync signal, demodulates to the original digital signal and gives it to a TBC unit 215.

**[0132]** The TBC unit 215 gives input data to an error corrector 216 after correcting the time base of input data. The error corrector 216 corrects an error using an error correction code and supplies the error corrected data to an intra-frame data extractor 217. If any error is left uncorrected, the error corrector 216 also transmits an error flag to the intra-frame data extractor 217.

**[0133]** When a trick play operation mode is instructed by a playback mode signal, the intra-frame data extractor 217 extracts intra-frame data only using intra-frame data length information. Further, the on-screen positions of respective data are revealed by the on-screen positional correspondence information. The output of the intra-frame data extractor 217 is given to a code reconstructor 219. The code reconstructor 219 reconstructs the output of the intra-frame data extractor 217 for one frame based on the playback mode signal. The intra-frame data extractor 217 gives an effective data instruction signal to a SKIP data adjuster 218. If invalidity of data such as blocks which were not reconstructed by the effective data instruction signal, etc. is indicated, the SKIP data adjuster 218 supplies a SKIP flag to the code reconstructor 219. If insufficient data length is indicated, the SKIP data adjuster 218 supplies a signal instructing adjustment of data length to the code reconstructor 219. When the SKIP flag is given, the code reconstructor 219 supplies the SKIP flag indicating a SKIP (correction) block at a timing corresponding to a block which was not reconstructed while outputs data after adjusting its length.

**[0134]** Next, the operations of the modification constructed as described above will be explained with reference to FIGURES 26 through 29. FIGURE 26 is an explanatory diagram showing an input data string, FIGURE 27 is an explanatory diagram showing the record format of VCR, FIGURE 28 is a diagram for explaining extraction of intra-frame data and FIGURE 29 is a diagram for explaining the on-screen positions of reconstructed data.

**[0135]** The input signal shown in FIGURE 26 is given to the frame head position detector 200 and the macro block head position detector 201. To the head position of respective macro blocks, a macro block start code as illustrated in the oblique lined section in FIGURE 26 has been added and for instance, a start code corresponding to a picture start code of the MPEG system has been added to a macro block at the frame head position. The frame head position detector 200 and the macro block head position detector 201 detect respective frame head positions and macro block head positions from these start codes.

**[0136]** The macro block on-screen position counter 202 obtains the on-screen vertical positions of the macro blocks from the start codes and at the same time, obtains the on-screen horizontal positions from the MBAI information, and supplies the on-screen positional correspondence information to indicate the correspondence between the macro blocks and the on-screen positions. The packeter 204 packets data for each packet unit length of a VCR. In this case, the on-screen positional correspondence information has been transformed to addresses and then supplied to the packeter 204. The packeter 204 packets input data by adding address information and macro block head position information, and then supplies the packet data to the error correction code adder 206. As each packet contains the on-screen positional correspondence information and the macro block head position information, it is possible to reconstruct data from the way of the packets even when discontinuous data are generated due to occurrence of errors, etc.

**[0137]** The packet data are added with error correction codes by the error correction adder 206, and further multiplexed



with SYNC and ID signals and are given to the record modulation means 208. The record modulation means 208 transforms data to a record format suited for VCR and records the data on the tape 211 through the recording amplifier 209 and the recording head 210.

[0138] FIGURE 27 shows one example of recorded data. As shown in FIGURE 27, SYNC signal and ID signal are allocated at the head position of the packet data, followed by on-screen positional correspondence information representing the on-screen positions of macro blocks and the macro block head positions information (11, 12, 13, .....). As seen in FIGURE 27, after a space 11 from the head position information of the macro block 1, its start code (the oblique lined section) is allocated and then, the macro block 1 is allocated. Thereafter, macro block are allocated in the same manner.

[0139] In the playback operation, the data recorded on the tape 211 are played back through the playback head 212. The played back data are then supplied to the equalizing-synchronizing-demodulating unit 214 through the playback amplifier 213. The equalizing-synchronizing-demodulating unit 214 restores the played back data to digital data, and then supplies them to the TBC unit 215. The TBC unit 215 passes the digital data to the error corrector 216 after correcting the time base of the data. The error corrector 216 corrects errors using an error correction code, and then supplies the error corrected data to the intra-frame data extractor 217.

[0140] As shown in FIGURE 28, in a macro block containing intra-frame data, intra-frame data length information (1-A, 3-A, 4-A, ..... ) have been allocated following a start code. In the trick play operation, the intra-frame data extractor 217 exclusively extracts the intra-frame data from the played back data. For instance, when explaining the macro block 3, the head position of the macro block 3 is obtained according to the head position information 13 and intra-frame data only of the macro block 3 is extracted using the intra-frame data length information 3-A which has been allocated next to a start code.

[0141] In the trick play operation, grasping the on-screen position according to the on-screen positional correspondence information of macro blocks, the code reconstructor 219 stores input intra-frame data of macro blocks sequentially for one frame time corresponding to the on-screen positions. FIGURE 28 shows the correspondence of the intra-frame data stored in the code reconstructor 219 with the on-screen positions. For intra-frame data and inter-frame data which have not been played back, the intra-frame data extractor 217 outputs a signal indicating that these data are invalid, and thus the SKIP data adjuster 218 supplies the SKIP code to the code reconstructor 219. Thus, the code reconstructor 219 skips all data other than input intra-frame data. Further, if data are insufficient after they have been reconstructed, the code reconstructor 219 supplies them by inserting an adjusting bit according to data supplied from the SKIP data adjuster 218.

[0142] Thus, it is possible to construct the picture by using effectively the played back data even in a trick play operation.

[0143] Referring now to FIGURES 12 and 13, the trick play operation will be explained in more detail.

[0144] Now, data recorded on the hatched section only are played back in the trick play operation by a VCR as illustrated in FIGURE 6. Further, when the played back signals of this hatched section are decoded to variable length codes, data which can be restored to the original picture signal using independent data are only intra-frame compression data. On the contrary, in case of inter-frame compression data, differential (predictive) signals only are decoded and therefore, in order to obtain the original picture signals, the preceding frame data are required. Therefore, only the intra-frame compression data out of played back signals are restored to the original picture and other data become unnecessary.

[0145] Now, it is assumed that the picture of the hatched section illustrated in FIGURE 24 is restored by intra-frame compression data which are played back in the trick play operation and the hatched section corresponds to the small blocks. That is, the played back data of each small block of the first, the 8th, the 15th, the 22nd, ..... macro blocks of the prescribed frame can be decoded. In this case, therefore, data of each small block of the first, the 7th, 14th, ..... macro blocks only are recorded in the VCR. That is, following the data at the head position of the frame (FIGURE 11 (d)), the first small block data of the first macro block are extracted. That is, in the prescribed frame, the data of the first small block is extracted. Next, a correction is directed through the fourth passage for the second through the 7th small blocks of the first macro block. Similarly, the fourth passage is selected for the all small blocks of the second through the 7th macro blocks. That is, in this case, only the control signal directing the connection is transmitted. Next, the first small block of the 8th macro block selects the fourth passage, while the second small block selects the first passage. Hereafter, in the similar manner the variable length data for the portion corresponding to the hatched section in FIGURE 24 are recorded and the control signal directing correction is recorded for other portions.

[0146] By selecting the fourth passage, data volume to be transmitted decreases and as a result, a surplus time is produced after transmitting the 360th macro block data. So, the third passage is selected for time adjustment. FIGURE 1 is a diagram for explaining the third passage by the oblique lines.

[0147] The oblique lined section in FIGURE 14 illustrates an adjusting bit by the third passage. In FIGURE 14, it is indicated that the data adjusting bit 59 is transmitted after transmitting the 360th macro block data.

[0148] As described above, the high efficient encoding/decoding system of the present invention has such effects

as even when macro block data length information is not available and the operation on the passage for a quantization coefficient is not executed, the format transformation at a receiving section is facilitated, making it possible to perform the decoding using discontinuous data effectively and moreover, error propagation can be suppressed without deteriorating the data utilization efficiency.

**[0149]** As described above, the present invention can provide an extremely preferable high efficient encoding/decoding system.

**[0150]** While there have been illustrated and described what are at present considered to be preferred embodiments of the present invention, it will be understood by those skilled in the art that various changes and modifications may be made, and equivalents may be substituted for elements thereof without departing from the scope of the present invention. In addition, many modifications may be made to adapt a particular situation or material to the teaching of the present invention without departing from the scope thereof. Therefore, it is intended that the present invention not be limited to the particular embodiment disclosed as the best mode contemplated for carrying out the present invention, but that the present invention include all embodiments falling within the scope of the appended claims.

## Claims

1. A method of encoding image data, comprising:

dividing an image into blocks, for use as an encoding unit for input data;  
grouping the encoding unit blocks into small blocks each comprising a plurality of encoding unit blocks; and  
defining macro blocks, each including macro block length data for indicating the length of the macro block itself in its head position, and at least one of the small blocks;

wherein the method further comprises generating, for each small block, either:

variable length data (57) having at least one collection of data obtained by performing a variable length encoding for every encoding unit block in the input data, and header information (54) associated with the variable length data; or  
adjustment bit data (59) for keeping the transmission rate constant; or  
a correction directing signal, for controlling a decoder to apply a data correction;  
and further comprises generating data for indicating whether the data are the variable length data, the adjustment bit data or the correction directing data by embedding the indicating data in a coefficient based on an encoding characteristic of the variable length data.

2. A method as claimed in claim 1, wherein, when the adjustment bit data are generated, length data (58) indicating the length of the adjustment bit data are also generated.

3. A method as claimed in claim 1, wherein, when the variable length data are generated by intra-frame coding, length data (56) for indicating the length of the small block are also generated.

4. An apparatus for encoding image data, comprising:

means for dividing an image into blocks, for use as an encoding unit for input data;  
means for grouping the encoding unit blocks into small blocks each comprising a plurality of encoding unit blocks; and defining macro blocks, each including macro block length data for indicating the length of the macro block itself in its head position, and at least one of the small blocks;

means for generating, for each small block, either:

variable length data (57) having at least one collection of data obtained by performing a variable length encoding for every encoding unit block on the input data, and header information (54) associated with the variable length data; or  
adjustment bit data (59) for keeping the transmission rate constant; or  
a correction directing signal, for controlling a decoder to apply a data correction;  
and means for generating data for indicating whether the data are the variable length data, the adjustment bit data or the correction directing data by embedding the indicating data in a coefficient based on an encoding characteristic of the variable length data.

5. Apparatus as claimed in claim 4, wherein, when the adjustment bit data are generated, length data (58) indicating the length of the adjustment bit data are also generated.

6. Apparatus as claimed in claim 4, wherein, when the variable length data are generated by intra-frame coding, length data for indicating the length of the small block are also generated.

7. Apparatus as claimed in claim 4, comprising a variable length encoder (16) for transmitting encoded data after processing the input data in blocks;

a data length measuring unit (66) for measuring and outputting the data length from the variable length encoder; a header information generator (72) for generating and outputting header information for the output of the encoder;

a first packeting unit for packeting either: the outputs of the encoder (16), the data length measuring unit (66) and the header information generator (72); a predetermined adjustment bit data and the length data indicating the length of the adjustment bit data itself; or the correction directing signal.

8. Apparatus as claimed in claim 7, further comprising:

a second packeting unit for packeting and outputting the outputs of the data length measuring unit (66) and the header information generator (72) into the output of the first packeting unit by constituting a macro block containing at least one of the small blocks.

9. Apparatus as claimed in claim 7, further comprising:

a second packeting unit for packeting and outputting a special code for indicating data of a macro block and the output of the header information generator into the output of the first packeting unit, by constituting the macro block containing at least one of the small blocks.

10. Apparatus as claimed in claim 4, comprising a recording system adapted for receiving an input image data signal which contains in every frame at least one macro block having at least one small block containing at least one encoding unit block and a special code allocated on the head position of the macro block itself for indicating the data position of the macro block, wherein the recording system includes a detector (201) for detecting the macro block on the head position of a picture screen, an address generator (203) for generating an address corresponding to at least one of screen positions of the respective macro blocks and the respective small blocks, and a packeting unit (204) for packeting the address from the address generator and the information of the head position of the picture screen in the macro blocks with the input signal.

11. An image encoding and decoding apparatus, comprising an encoding system, for encoding image data, and a decoding system, for reproducing recorded signals, wherein the encoding system comprises:

means for dividing an image into blocks, for use as an encoding unit for input data;

means for grouping the encoding unit blocks into small blocks each comprising a plurality of encoding unit blocks; and defining macro blocks, each including macro block length data for indicating the length of the macro block itself in its head position, and at least one of the small blocks;

means for generating, for each small block, either:

variable length data (57) having at least one collection of data obtained by performing a variable length encoding for every encoding unit block on the input data, and header information (54) associated with the variable length data; or

adjustment bit data (59) for keeping the transmission rate constant; or

a correction directing signal, for controlling a decoder to apply a data correction;

and means for generating data for indicating whether the data are the variable length data, the adjustment bit data or the correction directing data by embedding the indicating data in a coefficient based on an encoding characteristic of the variable length data,

and wherein the decoding system comprises:

an extractor (217) for exclusively extracting intra-frame compression data from the reproduced signal,

a reconstructing unit (219) capable of reconstructing the intra-frame compression data at a prescribed time unit,

a first adder for adding a skip flag to the output of the reconstructing unit at a timing other than that of the intra-frame compression data, and

a second adder capable of adding an adjusting bit for adjusting data length to the output of the reconstructing unit.

## 5 Patentansprüche

### 1. Verfahren zum Codieren von Bilddaten, umfassend:

das Unterteilen eines Bilds in Blöcke, die man als Codiereinheit für Eingabedaten verwendet;  
 10 das Gruppieren der Codiereinheitblöcke in kleine Blöcke, von denen jeder eine Anzahl Codiereinheitblöcke umfaßt; und  
 das Definieren von Makroblöcken, von denen jeder Makroblock-Längendaten enthält, die die eigene Länge des Makroblocks in seiner Kopfposition anzeigen, und mindestens einen der kleinen Blöcke,  
 wobei das Verfahren für jeden kleinen Block zudem umfaßt das Erzeugen von entweder:  
 15 Daten mit variabler Länge (57), die zumindest eine Zusammenstellung von Daten aufweisen, die man durch das Ausführen einer Codierung mit veränderlicher Länge für jeden Codiereinheitblock in den Eingabedaten erhält, und Headerinformation (54), die zu den Daten mit variabler Länge gehört; oder  
 Ausrichtungsbitdaten (59), die die Übertragungsrate konstant halten; oder  
 ein Korrekturanweisungssignal, das einen Decoder zum Anwenden einer Datenkorrektur steuert;  
 20 und das Verfahren ferner das Erzeugen von Daten umfaßt, die anzeigen, ob die Daten die Daten mit variabler Länge, die Ausrichtungsbitdaten oder die Korrekturanweisungsdaten sind, und zwar durch das Einbetten der Anzeigedaten in einen Koeffizienten abhängig von einem Codiermerkmal der Daten mit variabler Länge.

2. Verfahren nach Anspruch 1, worin beim Erzeugen der Ausrichtungsbitdaten auch Längendaten (58) erzeugt werden, die die Länge der Ausrichtungsbitdaten anzeigen.

3. Verfahren nach Anspruch 1, worin beim Erzeugen der Daten mit variabler Länge durch bildinterne Codierung auch Längendaten (56) erzeugt werden, die die Länge des kleinen Blocks anzeigen.

### 30 4. Einrichtung zum Codieren von Bilddaten, umfassend:

eine Vorrichtung zum Unterteilen eines Bilds in Blöcke, die man als Codiereinheit für Eingabedaten verwendet;  
 eine Vorrichtung zum Gruppieren der Codiereinheitblöcke in kleine Blöcke, von denen jeder eine Anzahl Codiereinheitblöcke umfaßt; und das Definieren von Makroblöcken, von denen jeder Makroblock-Längendaten enthält, die die eigene Länge des Makroblocks in seiner Kopfposition anzeigen, und mindestens einen  
 35 der kleinen Blöcke;

eine Vorrichtung, die für jeden kleinen Block entweder erzeugt:

40 Daten mit variabler Länge (57), die zumindest eine Zusammenstellung von Daten aufweisen, die man durch das Ausführen einer Codierung mit veränderlicher Länge für jeden Codiereinheitblock auf den Eingabedaten erhält, und Headerinformation (54), die zu den Daten mit variabler Länge gehört; oder  
 Ausrichtungsbitdaten (59), die die Übertragungsrate konstant halten; oder  
 ein Korrekturanweisungssignal, das einen Decoder zum Anwenden einer Datenkorrektur steuert;  
 45 und eine Vorrichtung zum Erzeugen von Daten, die anzeigen, ob die Daten die Daten mit variabler Länge, die Ausrichtungsbitdaten oder die Korrekturanweisungsdaten sind, und zwar durch das Einbetten der Anzeigedaten in einen Koeffizienten abhängig von einem Codiermerkmal der Daten mit variabler Länge.

5. Einrichtung nach Anspruch 4, worin beim Erzeugen der Ausrichtungsbitdaten auch Längendaten (58) erzeugt werden, die die Länge der Ausrichtungsbitdaten anzeigen.

6. Einrichtung nach Anspruch 4, worin beim Erzeugen der Daten mit variabler Länge durch bildinterne Codierung auch Längendaten erzeugt werden, die die Länge des kleinen Blocks anzeigen.

55 7. Einrichtung nach Anspruch 4, umfassend einen Codierer mit variabler Länge (16) zum Übertragen codierter Daten nach dem Verarbeiten der Eingabedaten in Blöcken;

eine Datenlängen-Meßeinheit (66), die die Datenlänge mißt und sie aus dem Codierer mit variabler Länge

ausgibt; einen Headerinformationserzeuger (72), der Headerinformation für das Ausgangssignal des Codierers erzeugt und ausgibt;  
eine erste Paketierungseinheit, die entweder paketiert: die Ausgangssignale des Codierers (16), der Datenlängen-Meßeinheit (66) und des Headerinformationserzeugers (72); vorbestimmte Ausrichtungsbitdaten und die Längendaten, die die Länge der Ausrichtungsbitdaten selbst angeben; oder das Korrekturanweisungssignal.

8. Einrichtung nach Anspruch 7, zudem umfassend:  
eine zweite Paketierungseinheit zum Paketieren und Ausgeben der Ausgangssignale der Datenlängen-Meßeinheit (66) und des Headerinformationserzeugers (72) in das Ausgangssignal der ersten Paketierungseinheit durch das Aufbauen eines Makroblocks, der zumindest einen der kleinen Blöcke enthält.
9. Einrichtung nach Anspruch 7, zudem umfassend:  
eine zweite Paketierungseinheit zum Paketieren und Ausgeben eines Sondercodes für Anzeigedaten eines Makroblocks und des Ausgangssignals des Headerinformationserzeugers in das Ausgangssignal der ersten Paketierungseinheit durch das Aufbauen eines Makroblocks, der zumindest einen der kleinen Blöcke enthält.
10. Einrichtung nach Anspruch 4, umfassend ein Aufzeichnungssystem, das zum Empfangen eines Eingabe-Bilddatensignals eingerichtet ist, das in jedem Frame zumindest einen Makroblock enthält, der mindestens einen kleinen Block aufweist, der zumindest einen Codiereinheitblock enthält und einen Sondercode, der in der Kopfposition des Makroblocks selbst angeordnet ist und die Datenposition des Makroblocks anzeigt, wobei das Aufzeichnungssystem einen Detektor (201) enthält, der den Makroblock an der Kopfposition eines Bildschirms erkennt, einen Adreßgenerator (203), der eine Adresse erzeugt, die zumindest einer der Bildschirmpositionen des jeweiligen Makroblocks und der jeweiligen kleinen Blöcke entspricht, und eine Paketierungseinheit (204), die die Adresse aus dem Adreßgenerator und die Information der Kopfposition des Bildschirms in den Makroblöcken mit dem Eingangssignal paketiert.
11. Bildcodier- und Decodiereinrichtung, umfassend ein Codiersystem zum Codieren von Bilddaten und ein Decodiersystem zum Wiedergeben aufgezeichneter Signale, wobei das Codiersystem umfaßt:  
eine Vorrichtung zum Unterteilen eines Bilds in Blöcke, die man als Codiereinheit für Eingabedaten verwendet;  
eine Vorrichtung zum Gruppieren der Codiereinheitblöcke in kleine Blöcke, von denen jeder eine Anzahl Codiereinheitblöcke umfaßt; und das Definieren von Makroblöcken, von denen jeder Makroblock-Längendaten enthält, die die eigene Länge des Makroblocks in seiner Kopfposition anzeigen, und mindestens einen der kleinen Blöcke;  
eine Vorrichtung, die für jeden Makroblock entweder erzeugt:  
Daten mit variabler Länge (57), die zumindest eine Zusammenstellung von Daten aufweisen, die man durch das Ausführen einer Codierung mit veränderlicher Länge für jeden Codiereinheitblock auf den Eingabedaten erhält, und Headerinformation (54), die zu den Daten mit variabler Länge gehört; oder  
Ausrichtungsbitdaten (59), die die Übertragungsrate konstant halten; oder  
ein Korrekturanweisungssignal, das einen Decoder zum Anwenden einer Datenkorrektur steuert;  
und eine Vorrichtung zum Erzeugen von Daten, die anzeigen, ob die Daten die Daten mit variabler Länge, die Ausrichtungsbitdaten oder die Korrekturanweisungsdaten sind, und zwar durch das Einbetten der Anzeigedaten in einen Koeffizienten abhängig von einem Codiermerkmal der Daten mit variabler Länge,  
und wobei das Decodiersystem umfaßt:  
einen Entnehmer (217), der ausschließlich bildinterne Kompressionsdaten aus dem wiedergegebenen Signal entnimmt,  
eine Wiederherstellungseinheit (219), die die bildinternen Kompressionsdaten in einer vorbestimmten Zeiteinheit wiederherstellen kann,  
einen ersten Addierer zum Addieren eines Überspringflags zum Ausgangssignal der Wiederherstellungseinheit mit einem von den bildinternen Kompressionsdaten verschiedenen Timing, und  
einen zweiten Addierer, der dem Ausgangssignal der Wiederherstellungseinheit ein Ausrichtbit zum Ausrichten der Datenlänge hinzufügen kann.

## Revendications

1. Un procédé de codage de données d'image, comprenant les opérations consistant à :

diviser une image en blocs en vue d'une utilisation en tant qu'unité de codage pour données d'entrée ;

grouper les blocs d'unité de codage en petits blocs comprenant chacun une pluralité de blocs d'unité de codage ; et

définir des macroblocs, comprenant chacun des données de longueur de macrobloc pour indiquer la longueur du macrobloc lui-même dans sa position de tête, et au moins un des petits blocs ;

dans lequel le procédé comprend en outre le fait de générer, pour chaque petit bloc, soit :

des données de longueur variable (57) présentant au moins une collecte de données obtenue en effectuant un codage de longueur variable pour chaque bloc d'unité de codage des données d'entrée, et une information d'en-tête (54) associée aux données de longueur variable ; soit

des données de bit de réglage (59) pour maintenir constant le débit de transmission ; soit

un signal de direction de correction pour faire qu'un décodeur applique une correction de données ;

et qui comprend en outre l'opération consistant à générer des données d'indication pour indiquer si les données sont les données de longueur variable, les données de bit de réglage ou les données de direction de correction en encastrant les données d'indication dans un coefficient basé sur une caractéristique de codage des données de longueur variable.

2. Un procédé tel que revendiqué à la revendication 1, dans lequel, lorsque les données de bit de réglage sont générées, on génère également des données de longueur (58) indiquant la longueur des données de bit de réglage.

3. Un procédé tel que revendiqué à la revendication 1, dans lequel, lorsque les données de longueur variable sont générées par codage intra-trame, on génère également des données de longueur (56) pour indiquer la longueur du petit bloc.

4. Un appareil pour coder des données d'image, comprenant :

des moyens pour diviser une image en blocs en vue d'une utilisation en tant qu'unité de codage pour données d'entrée ;

des moyens pour grouper les blocs d'unité de codage en petits blocs comprenant chacun une pluralité de blocs d'unité de codage ; et pour définir des macroblocs, comprenant chacun des données de longueur de macrobloc pour indiquer la longueur du macrobloc lui-même dans sa position de tête, et au moins un des petits blocs ;

des moyens pour générer, pour chaque petit bloc, soit :

des données de longueur variable (57) présentant au moins une collecte de données obtenue en effectuant un codage de longueur variable pour chaque bloc d'unité de codage des données d'entrée, et une information d'en-tête (54) associée aux données de longueur variable ; soit

des données de bit de réglage (59) pour maintenir constant le débit de transmission ; soit

un signal de direction de correction pour faire qu'un décodeur applique une correction de données ;

et des moyens pour générer des données d'indication pour indiquer si les données sont les données de longueur variable, les données de bit de réglage ou les données de direction de correction en encastrant les données d'indication dans un coefficient basé sur une caractéristique de codage des données de longueur variable.

5. Appareil tel que revendiqué à la revendication 4, dans lequel, lorsque les données de bit de réglage sont générées, on génère également des données de longueur (58) indiquant la longueur des données de bit de réglage.

6. Appareil tel que revendiqué à la revendication 4, dans lequel, lorsque les données de longueur variable sont générées par codage intra-trame, on génère également des données de longueur pour indiquer la longueur du petit bloc.

7. Appareil tel que revendiqué à la revendication 4, comprenant un codeur de longueur variable (16) pour transmettre des données codées après traitement des données d'entrée en blocs ;

une unité de mesure de longueur de données (66) pour mesurer et délivrer la longueur de données à partir du codeur de longueur variable ;

un générateur d'information d'en-tête (72) pour générer et délivrer une information d'en-tête pour la sortie du codeur ;

une première unité de mise en paquet pour mettre en paquet soit : les sorties du décodeur (16), l'unité de mesure de longueur de données (66) et le générateur d'information d'en-tête (72) ; une donnée de bit de réglage prédéterminée et les données de longueur indiquant la longueur des données de bit de réglage elle-même ; soit le signal de direction de correction.

8. Appareil tel que revendiqué à la revendication 7, comprenant en outre :

une seconde unité de mise en paquet pour mettre en paquet et délivrer les sorties de l'unité de mesure de longueur de données (66) et du générateur d'information d'en-tête (72) dans la sortie de la première unité de mise en paquet en constituant un macrobloc contenant au moins un des petits blocs.

9. Appareil tel que revendiqué à la revendication 7, comprenant en outre :

une seconde unité de mise en paquet pour mettre en paquet et délivrer un code spécial permettant d'indiquer des données d'un macrobloc et la sortie du générateur d'information d'en-tête dans la sortie de la première unité de mise en paquet, en constituant le macrobloc contenant au moins un des petits blocs.

10. Appareil tel que revendiqué à la revendication 4, comprenant un système d'enregistrement adapté à recevoir un signal de données d'image d'entrée qui contient, dans chaque trame, au moins un macrobloc présentant au moins un petit bloc contenant au moins un bloc d'unité de codage et un code spécial affecté à la position de tête du macrobloc lui-même pour indiquer la position des données du macrobloc, dans lequel le système d'enregistrement comprend un détecteur (201) pour détecter le macrobloc sur la position de tête d'un écran d'image, un générateur d'adresse (203) pour générer une adresse correspondant à au moins une des positions d'écran des macroblocs respectifs et des petits blocs respectifs, et une unité de mise en paquet (204) pour mettre en paquet l'adresse provenant du générateur (213) et l'information de la position de tête de l'écran d'image dans les macroblocs avec le signal d'entrée.

11. Un appareil de codage et de décodage d'image, comprenant un système de codage pour coder des données d'image, et un système de décodage pour reproduire des signaux enregistrés, dans lequel le système de codage comprend :

des moyens pour diviser une image en blocs en vue d'une utilisation en tant qu'unité de codage pour données d'entrée ;

des moyens pour grouper les blocs d'unité de codage en petits blocs comprenant chacun une pluralité de blocs d'unité de codage ; et définir des macroblocs, comprenant chacun des données de longueur de macrobloc pour indiquer la longueur du macrobloc lui-même dans sa position de tête, et au moins un des petits blocs ;

des moyens pour générer, pour chaque petit bloc, soit :

des données de longueur variable (57) présentant au moins une collecte de données obtenue en effectuant un codage de longueur variable pour chaque bloc d'unité de codage des données d'entrée, et une information d'en-tête (54) associée aux données de longueur variable ; soit

des données de bit de réglage (59) pour maintenir constant le débit de transmission ; soit

un signal de direction de correction pour faire qu'un décodeur applique une correction de données ;

et des moyens pour générer des données d'indication pour indiquer si les données sont les données de longueur variable, les données de bit de réglage ou les données de direction de correction en encastrant les données d'indication dans un coefficient basé sur une caractéristique de codage des données de longueur variable,

5

et dans lequel le système de décodage comprend :

un extracteur (217) pour extraire exclusivement, du signal reproduit, des données de compression intra-trame,

10

une unité de reconstruction (219) capable de reconstruire les données de compression intra-trame à une unité de temps prescrite,

un premier additionneur pour ajouter un indicateur de saut à la sortie de l'unité de reconstruction à une synchronisation autre que celle des données de compression intra-trame, et

15

un second additionneur capable d'ajouter un bit de réglage pour régler la longueur des données à la sortie de l'unité de reconstruction.

20

!

25

30

35

40

45

50

55



FIG. 1

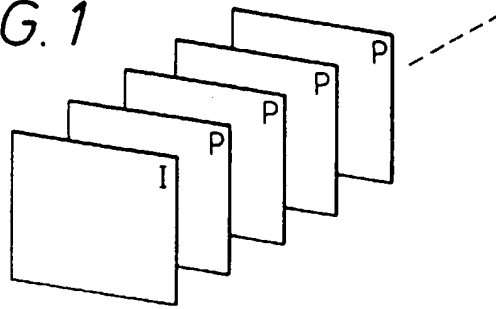


FIG. 6



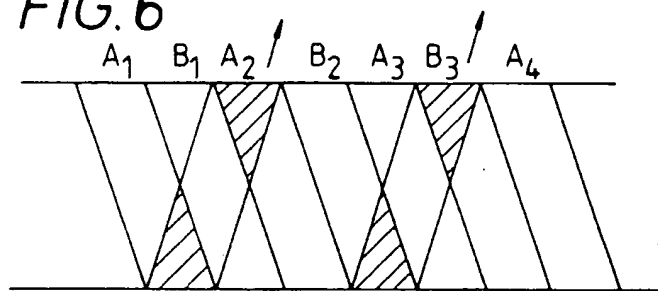



FIG. 9

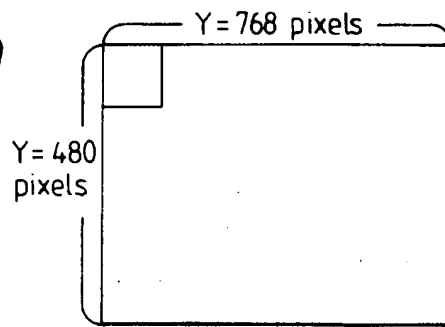


(a)



(b)



(c)



(d)

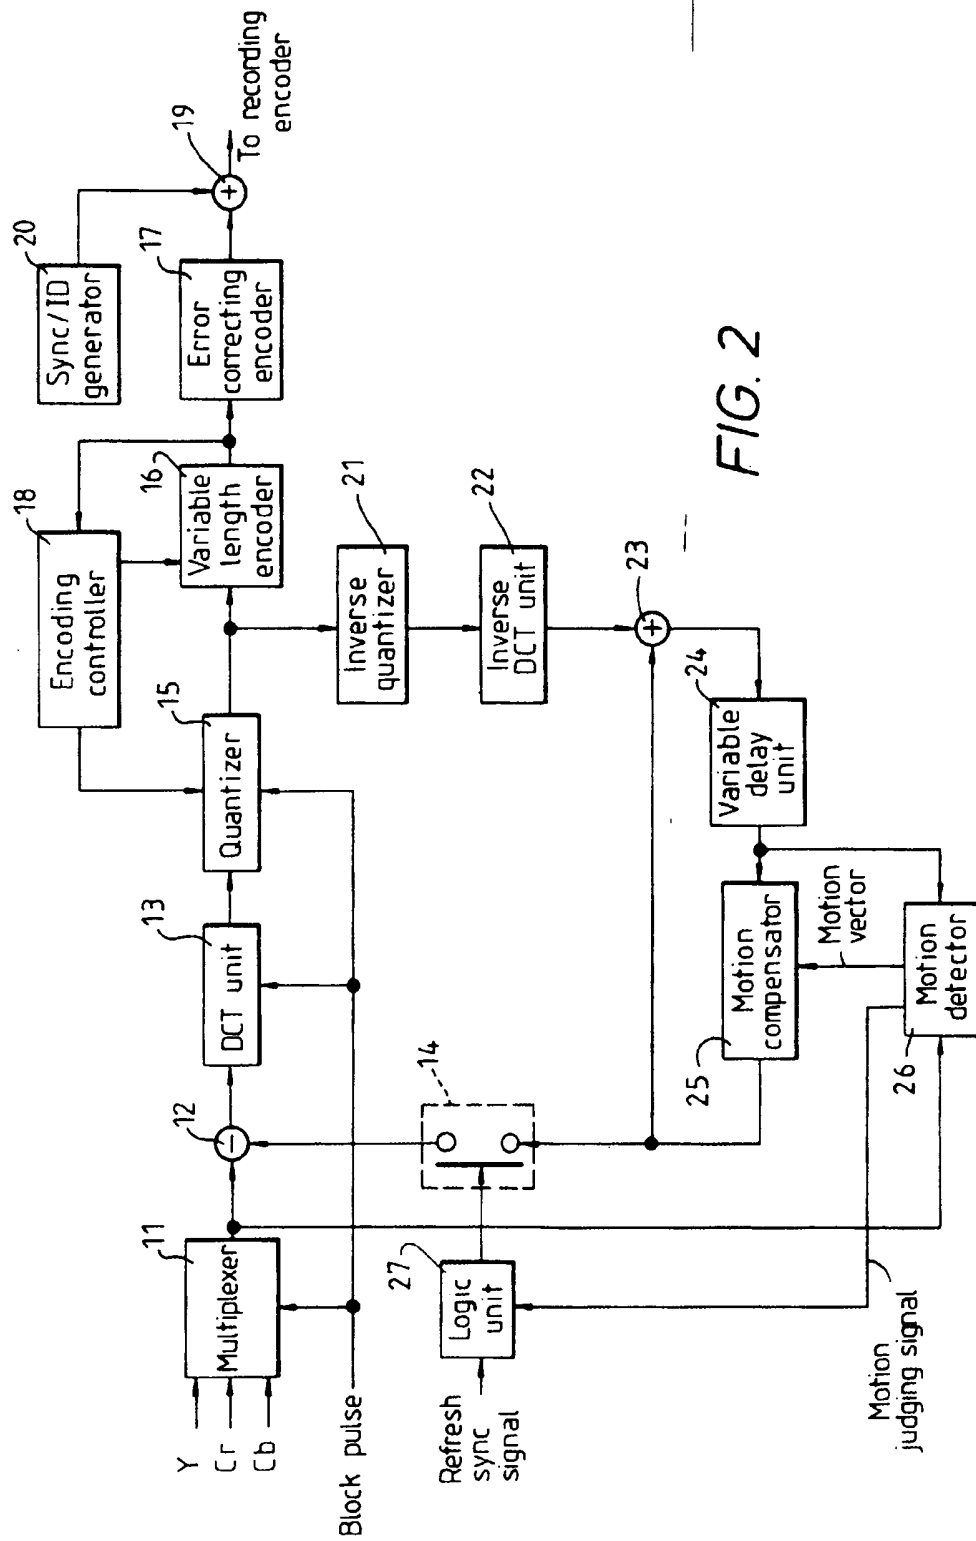


FIG. 2

FIG. 3

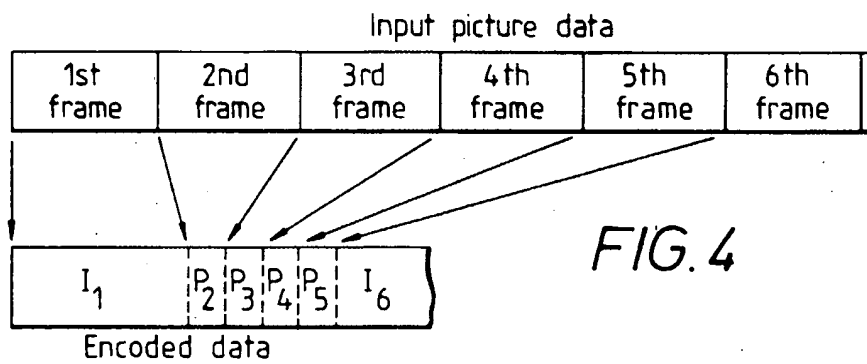
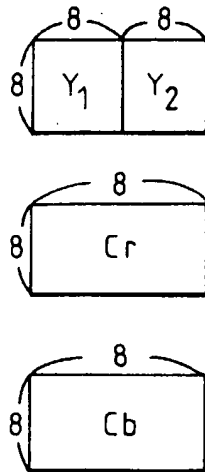


FIG. 4

FIG. 12




FIG. 13

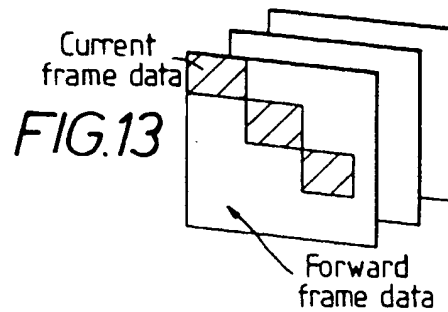


FIG. 14


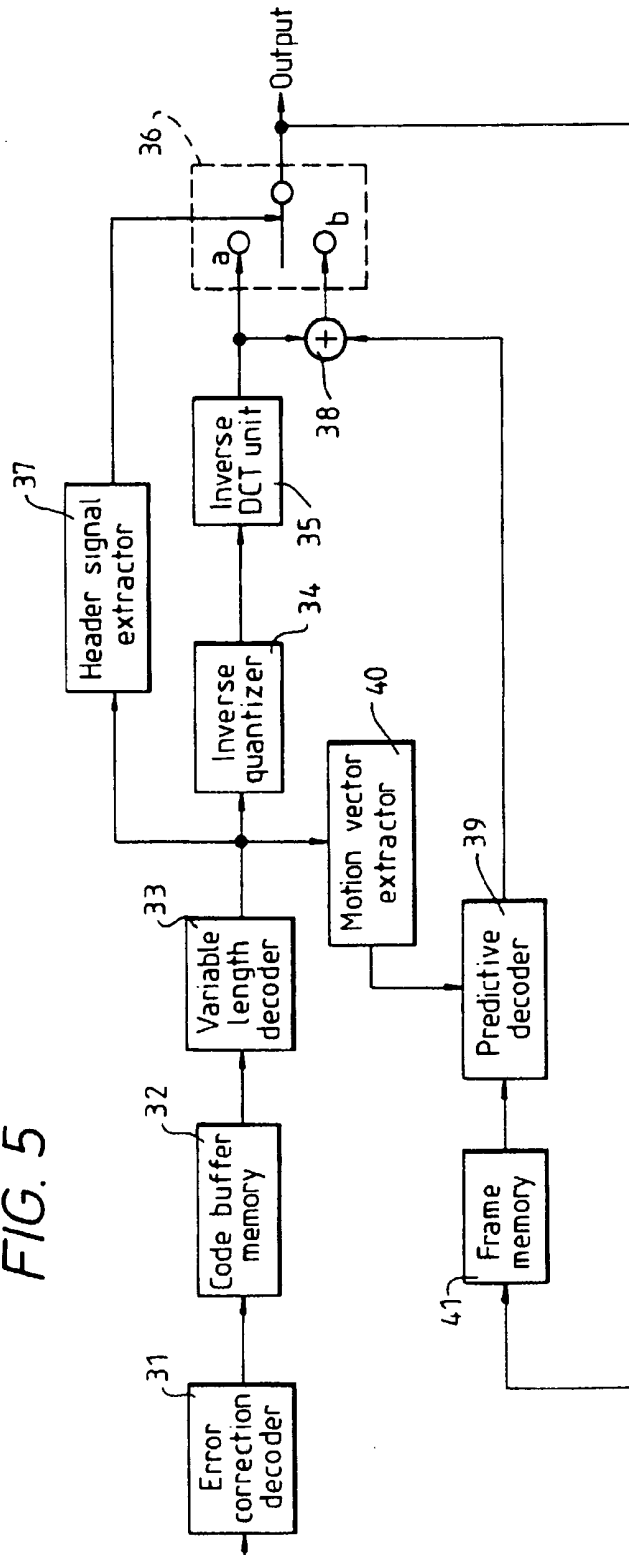


FIG. 5



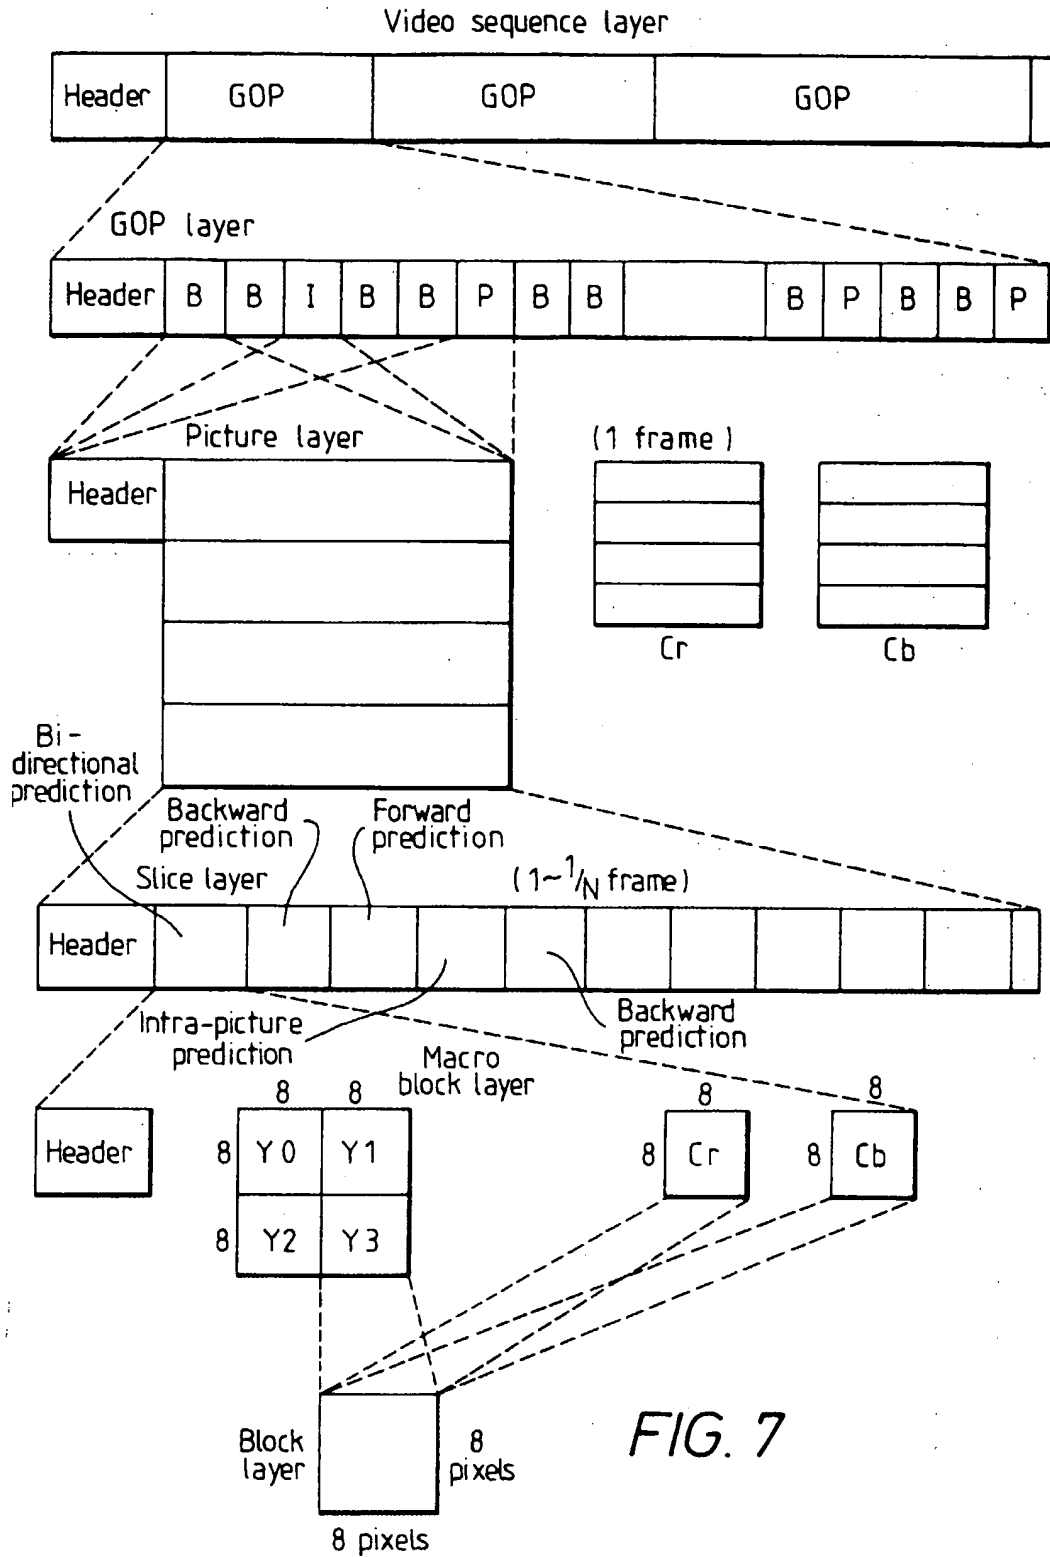


FIG. 8

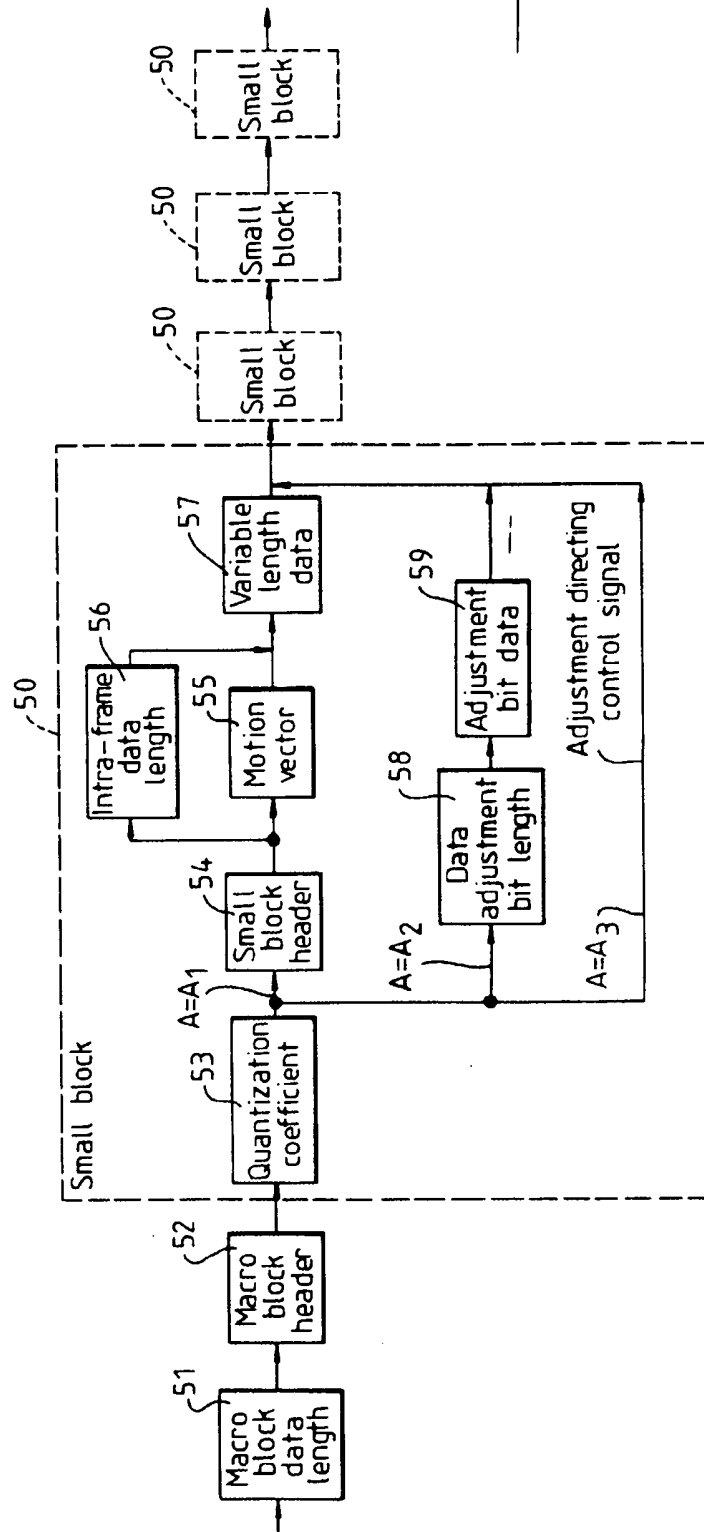


FIG. 10

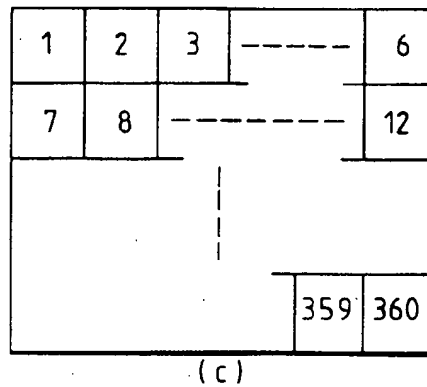
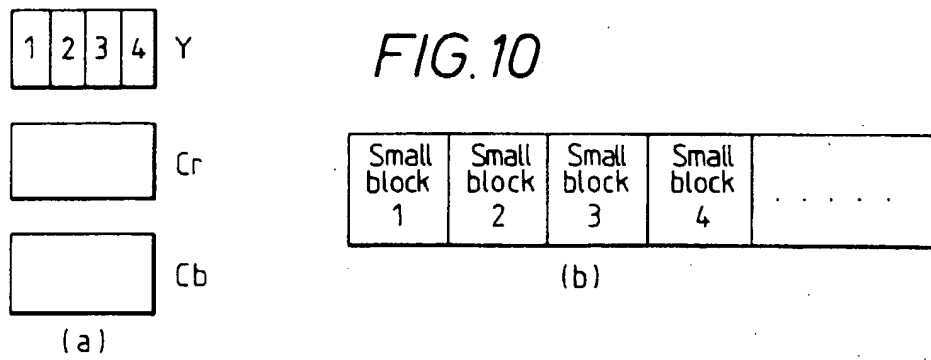


FIG. 15

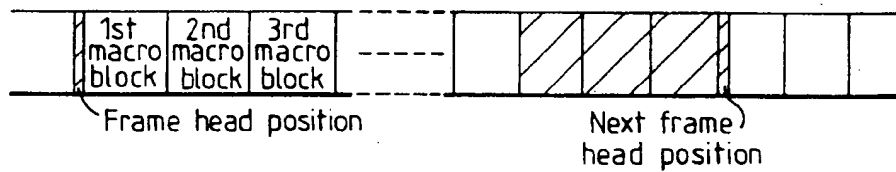


FIG. 16



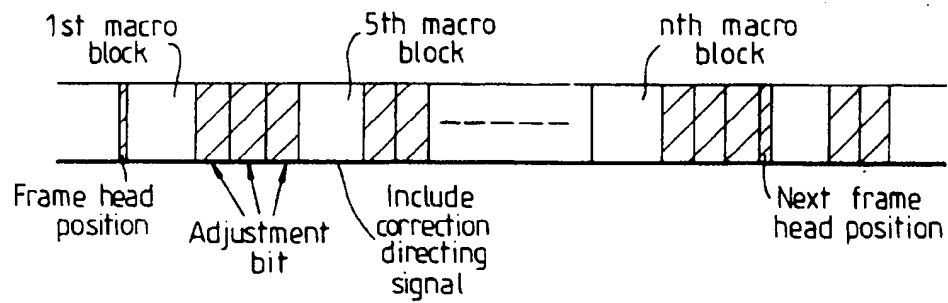



FIG. 11

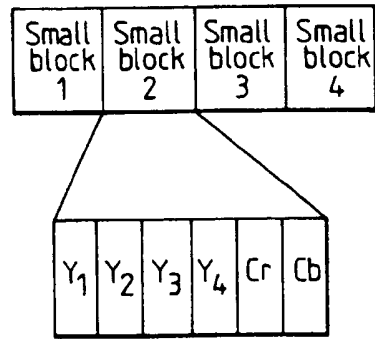


(a)

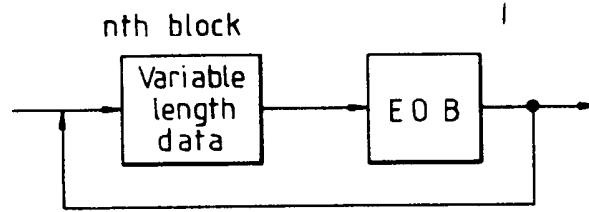

(b)

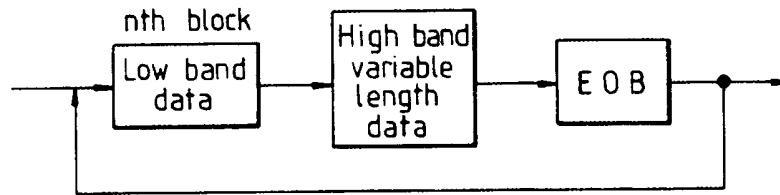

(c)

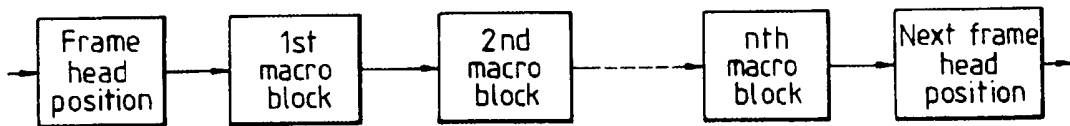

(d)



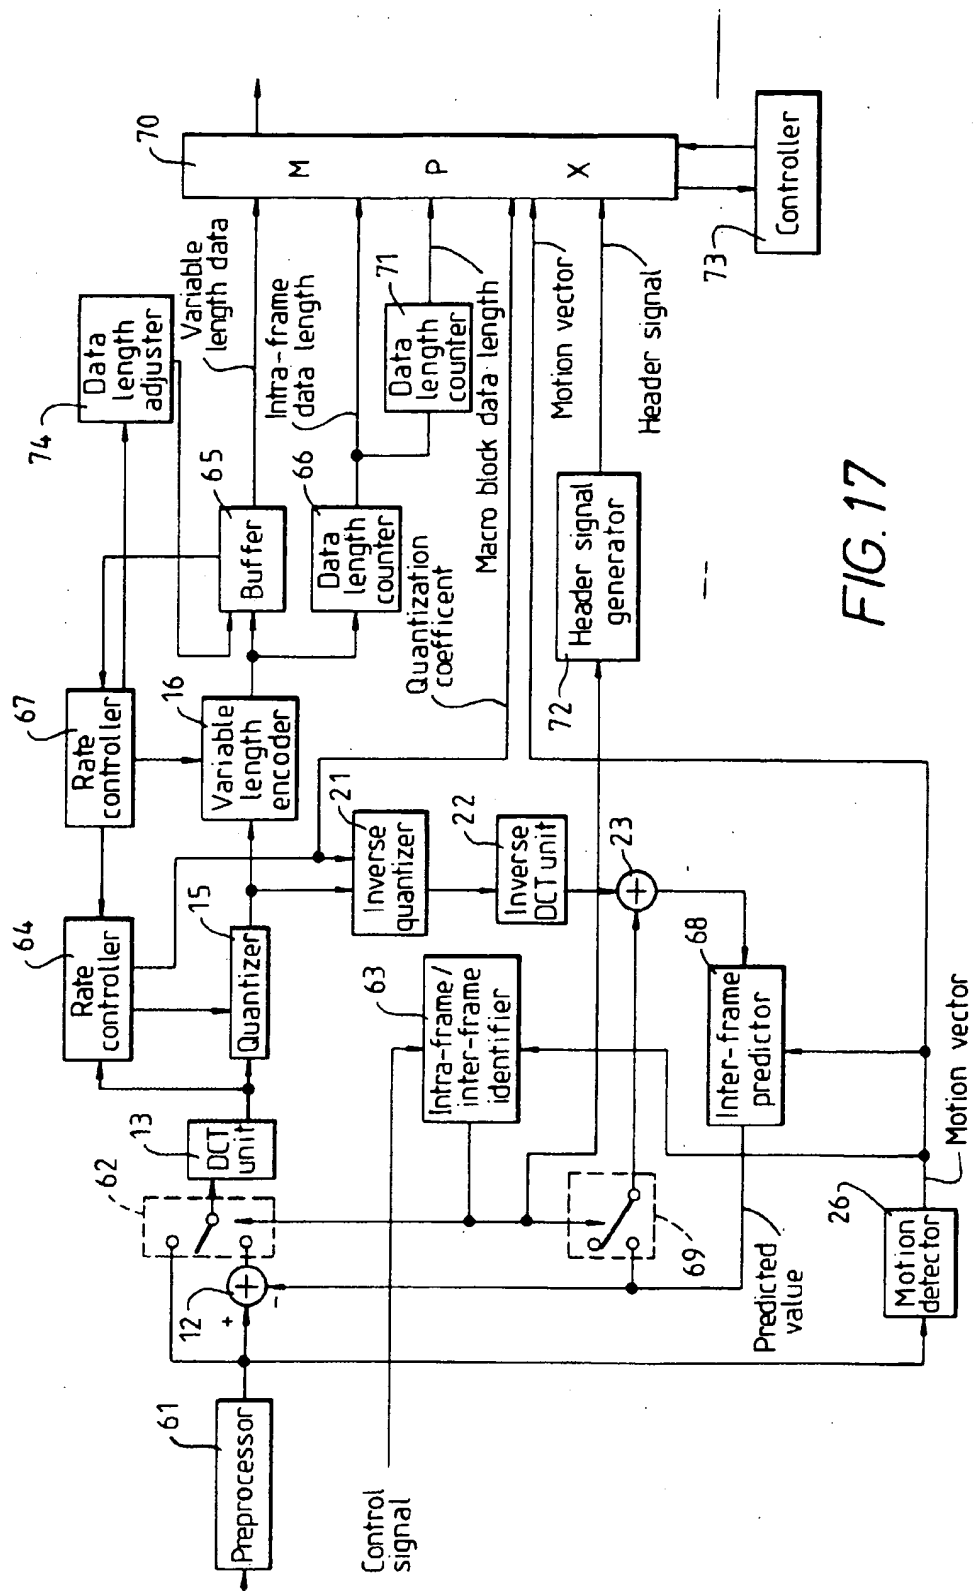


FIG. 17

FIG. 18

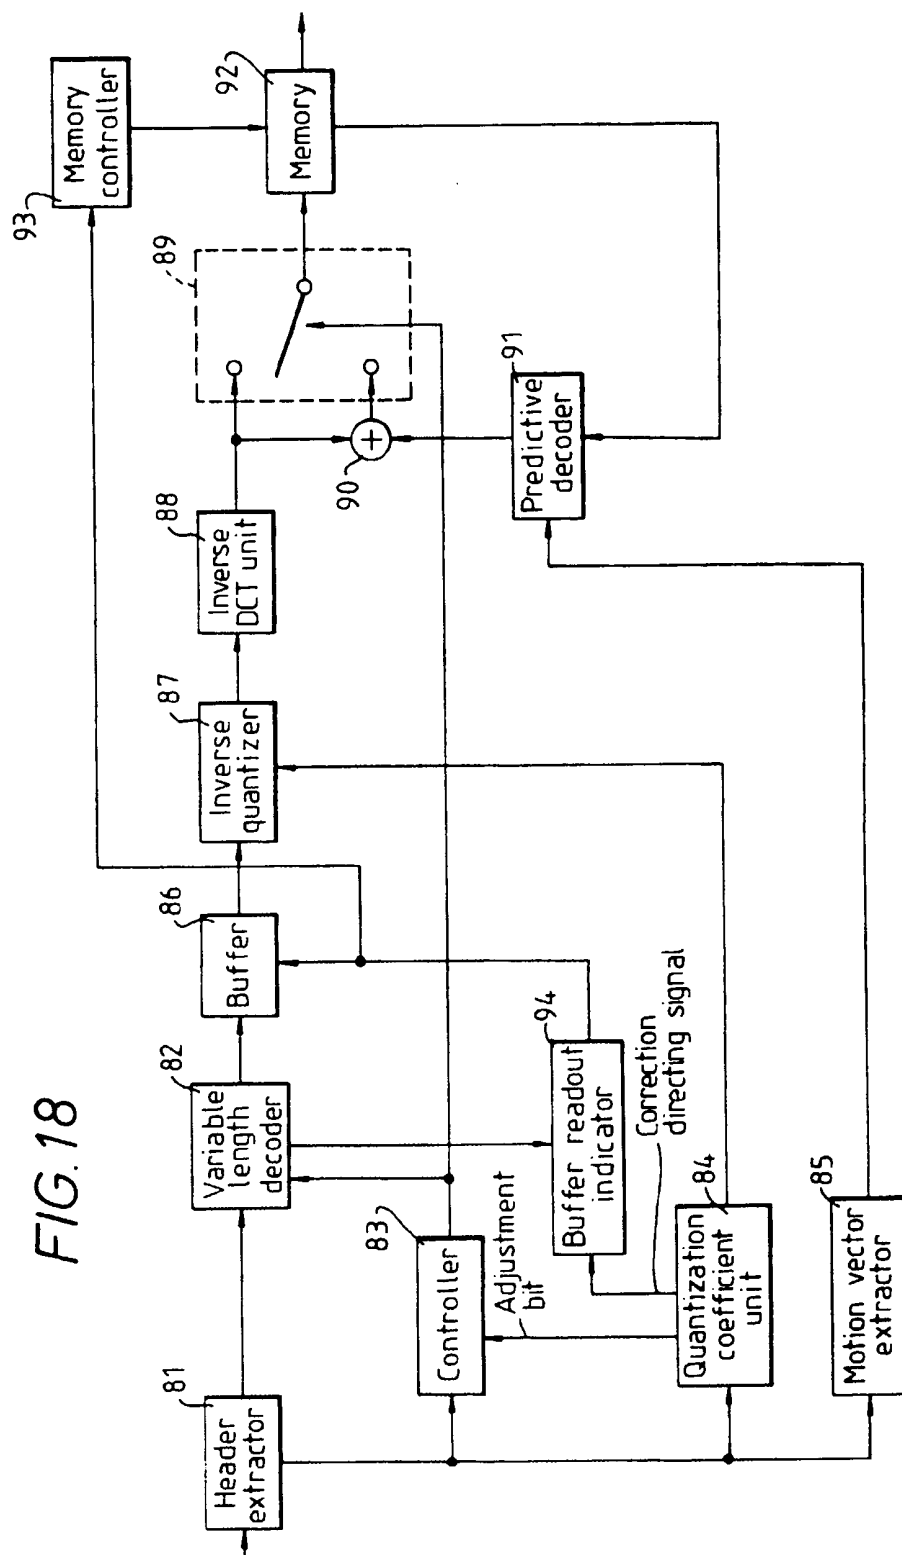


FIG. 19

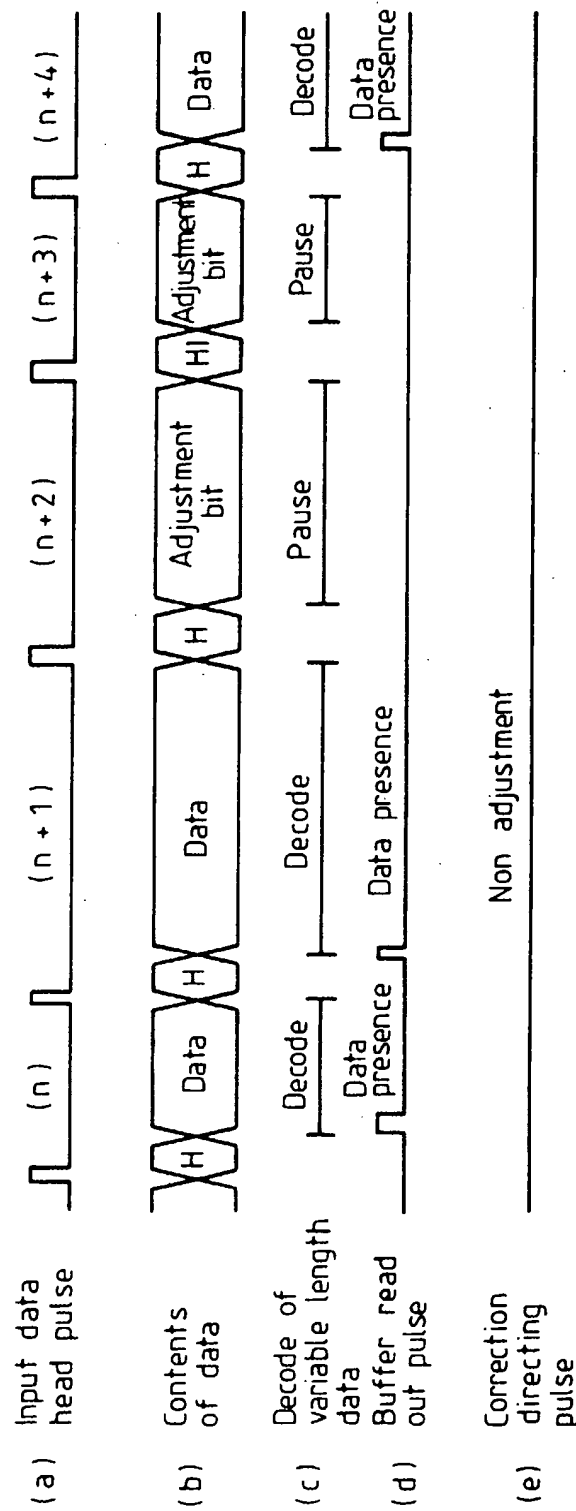


FIG. 20

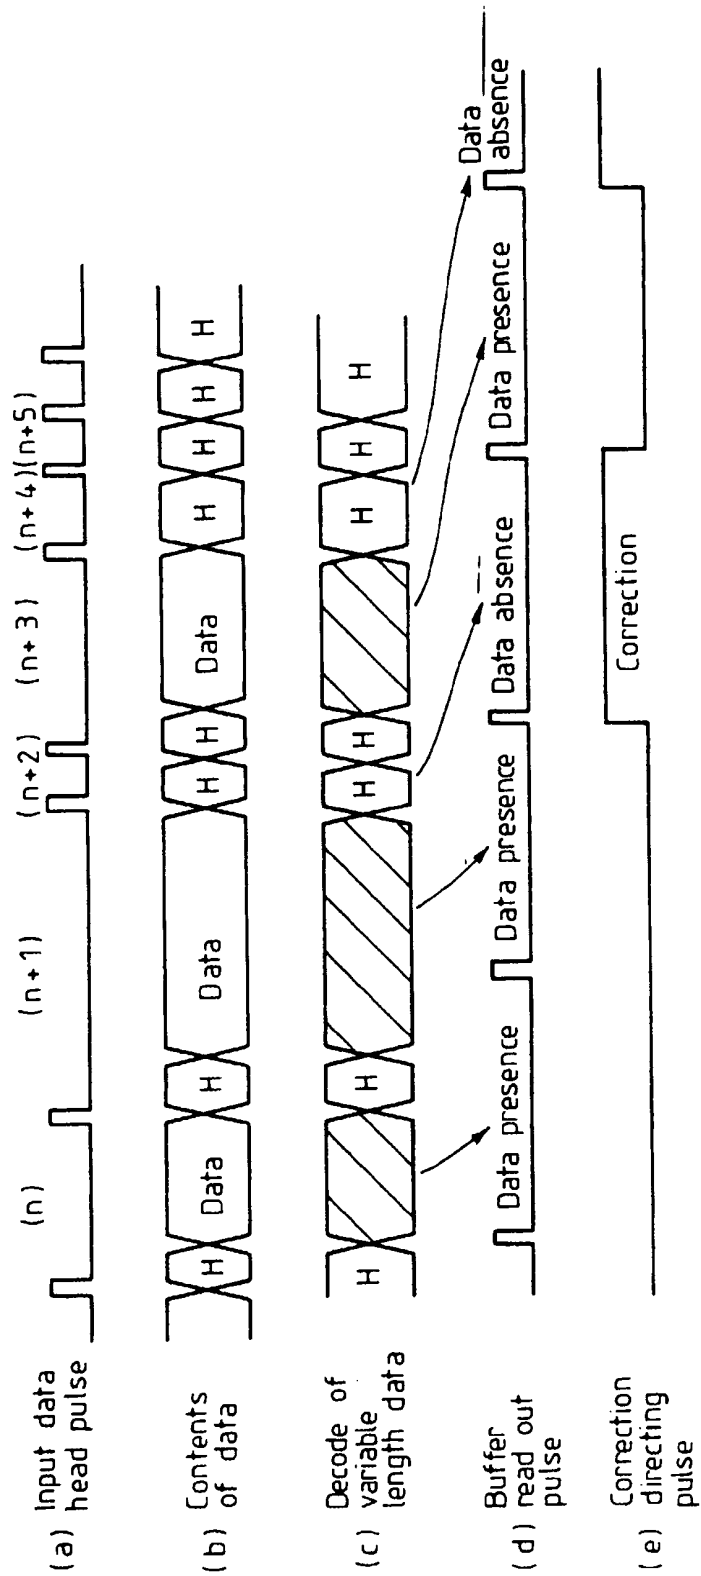


FIG. 21

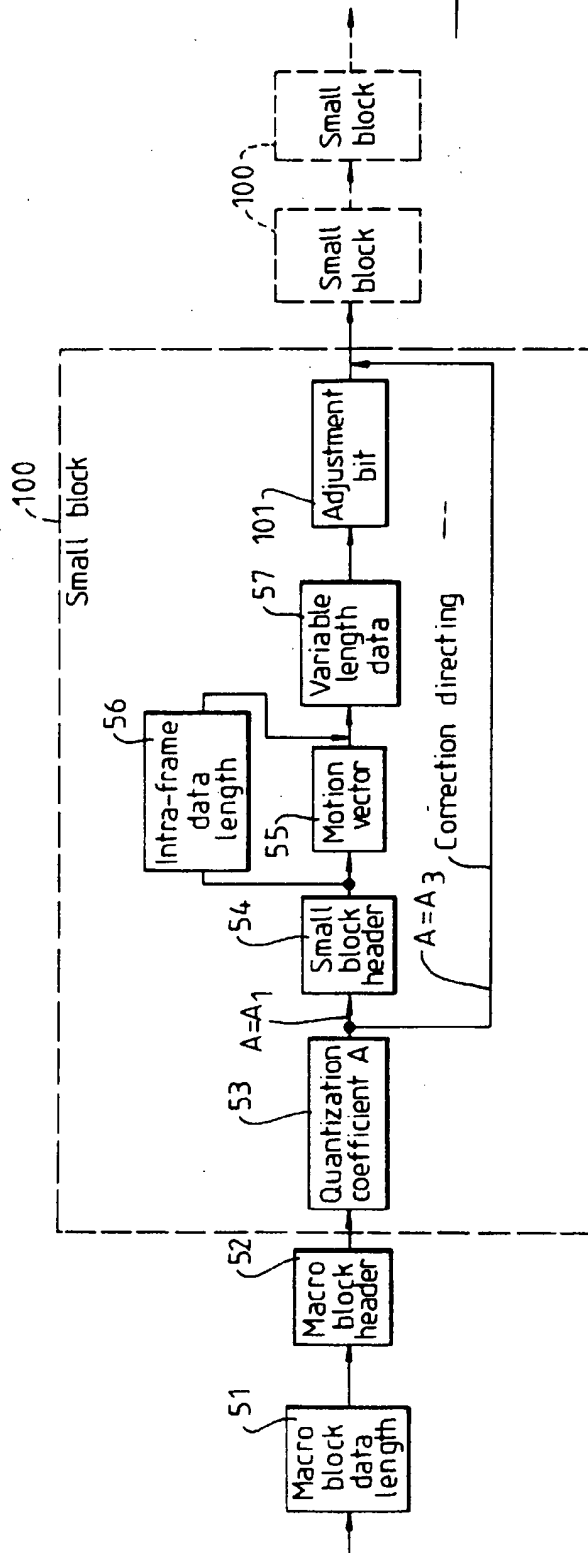


FIG. 22

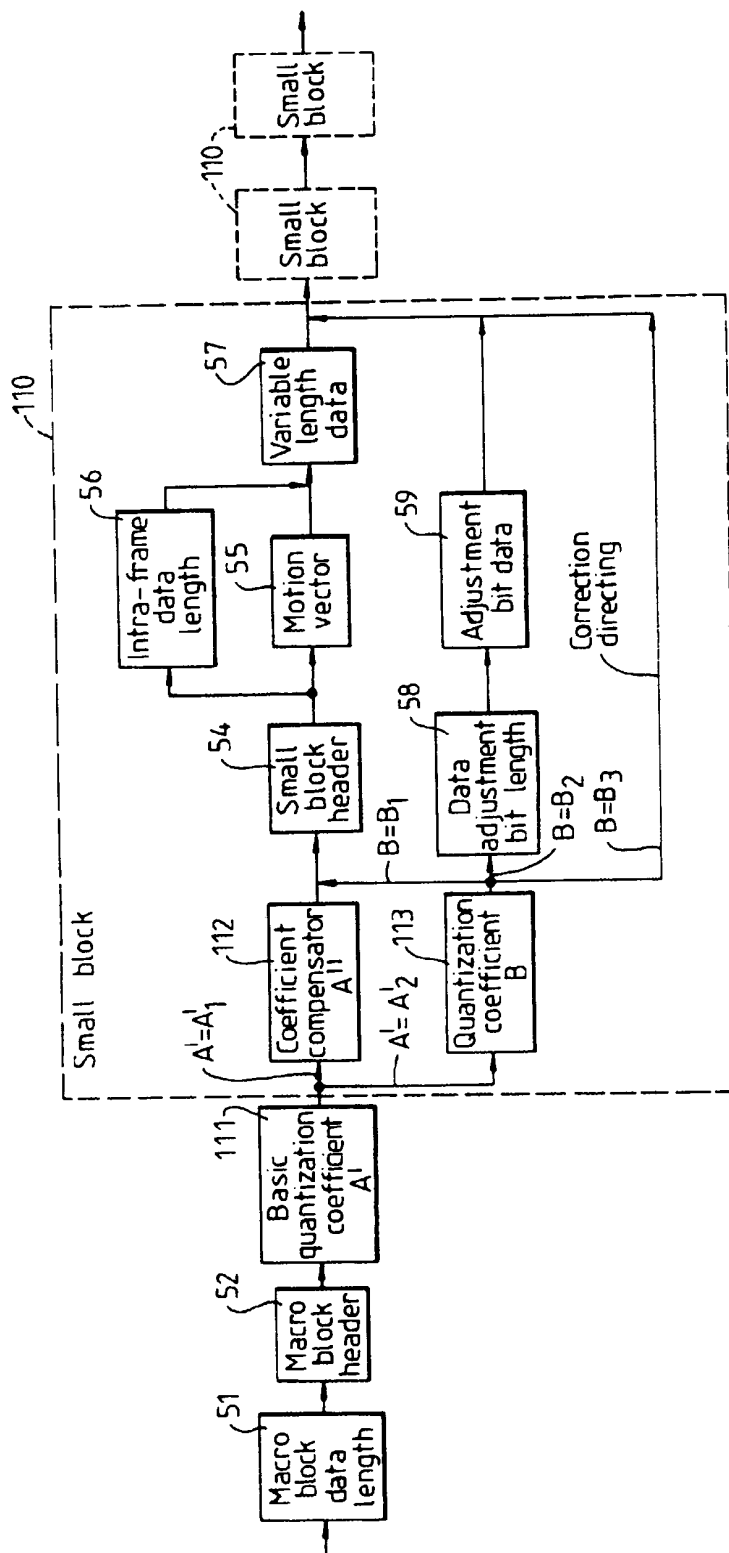


FIG. 23

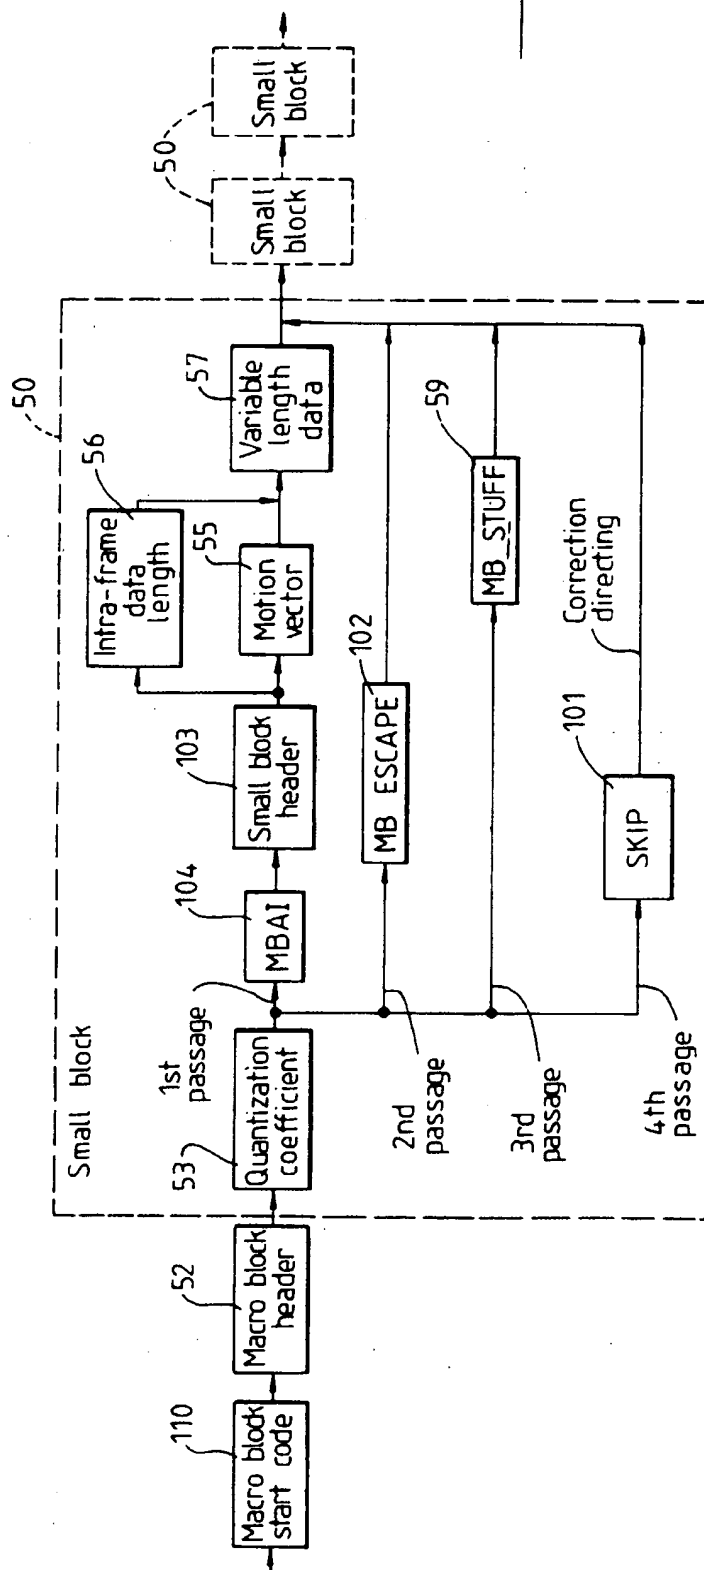
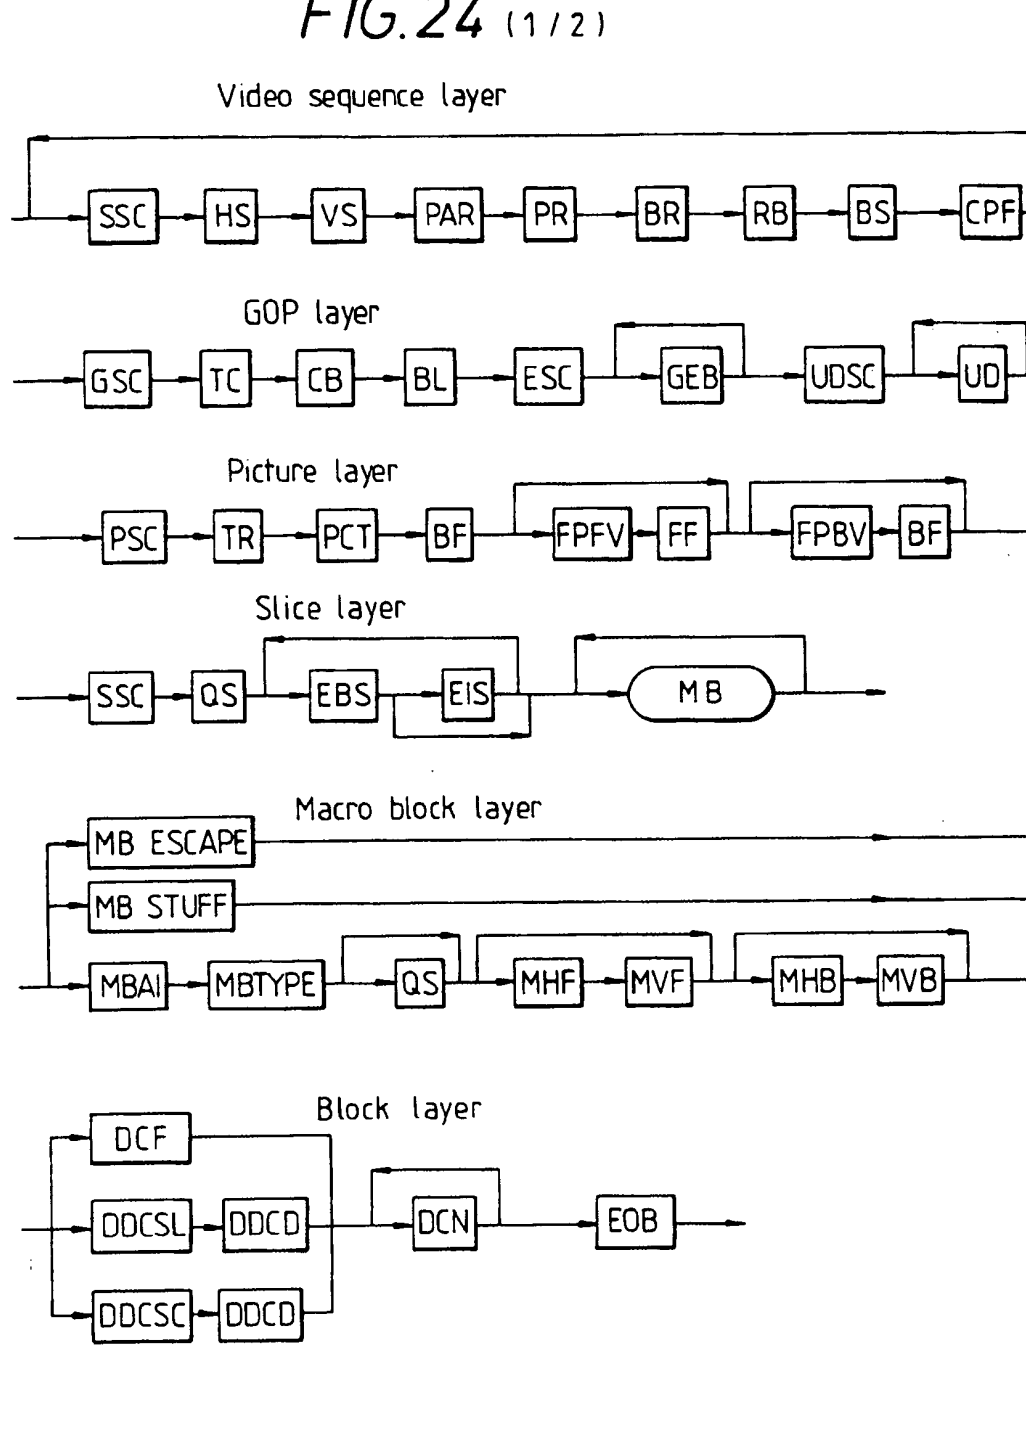


FIG. 24 (1/2)





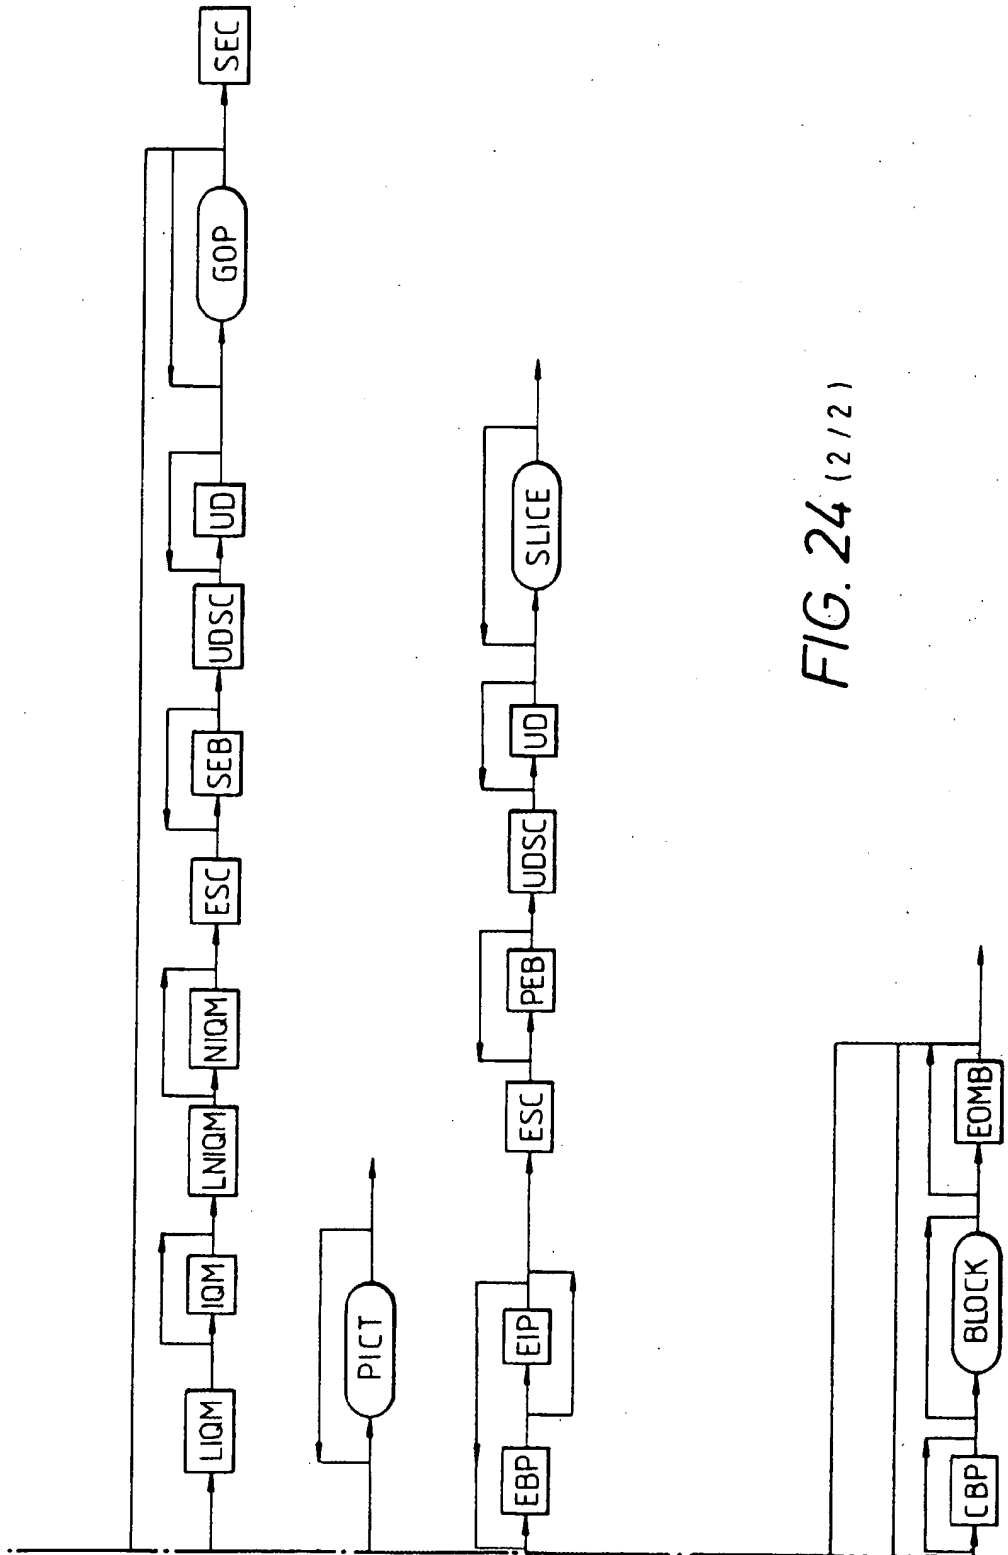


FIG. 24 (2/2)

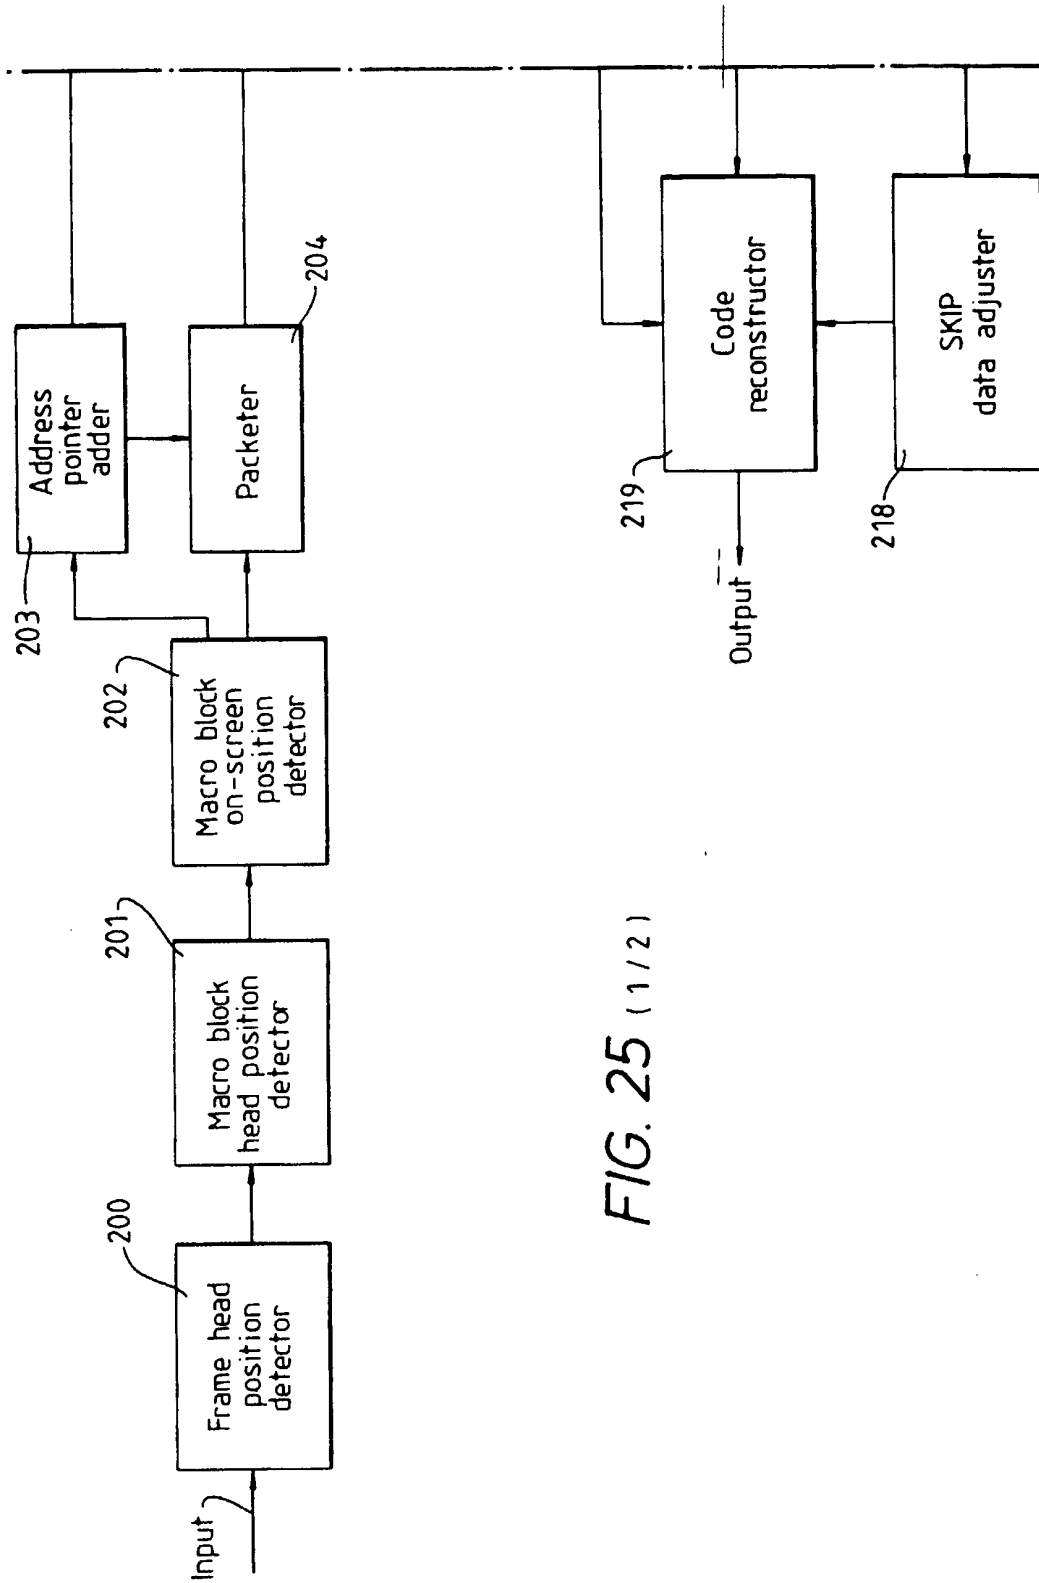
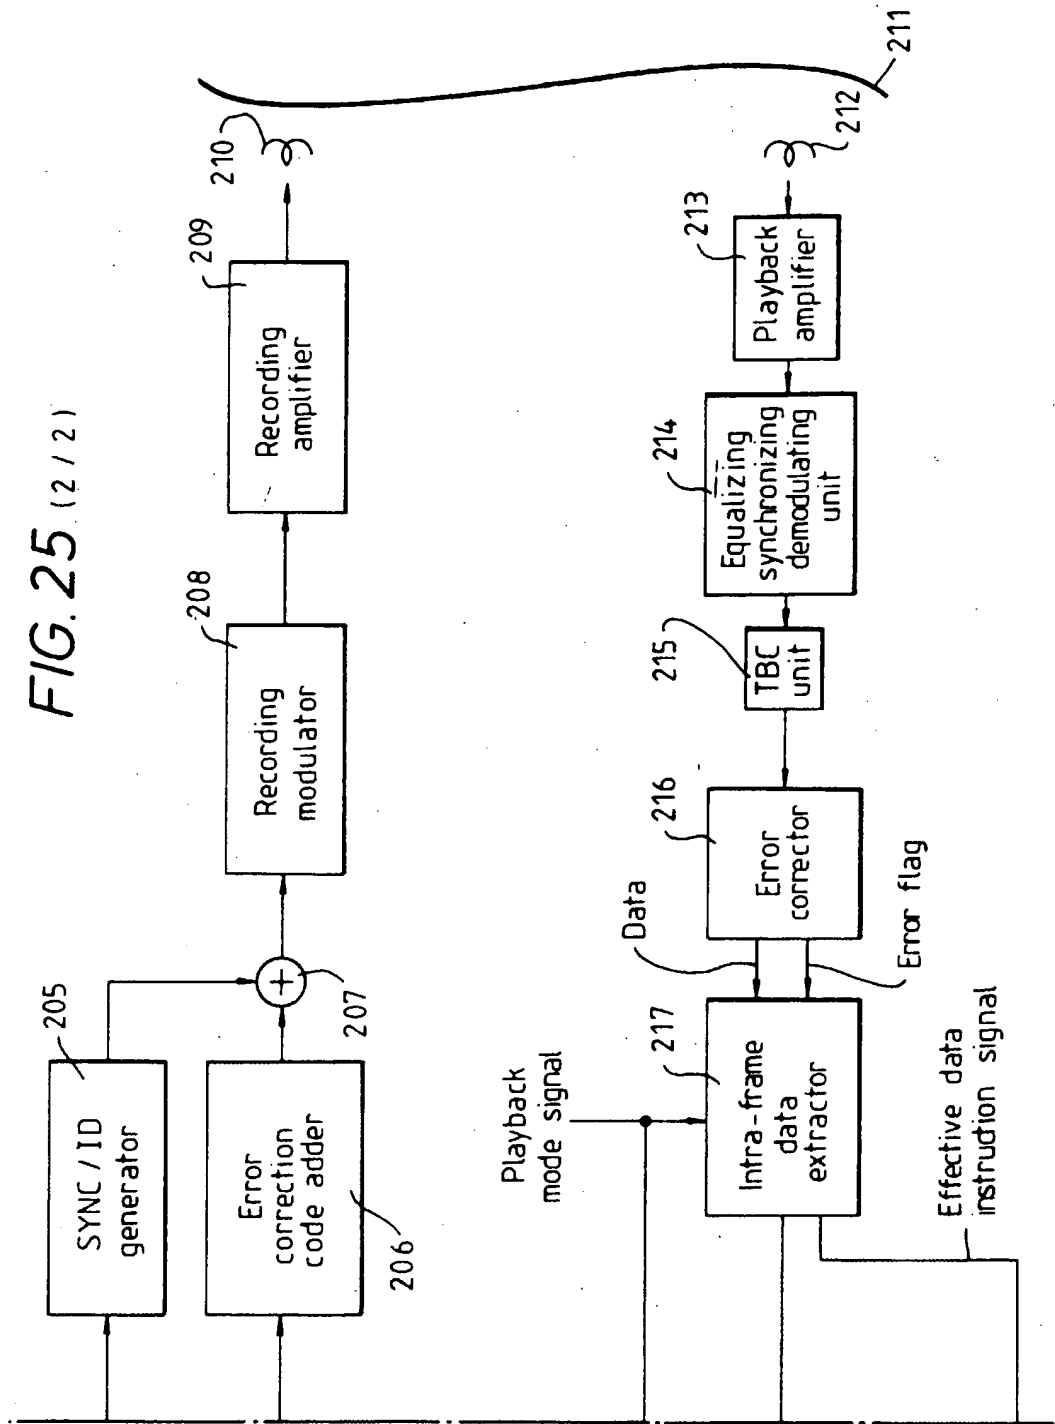
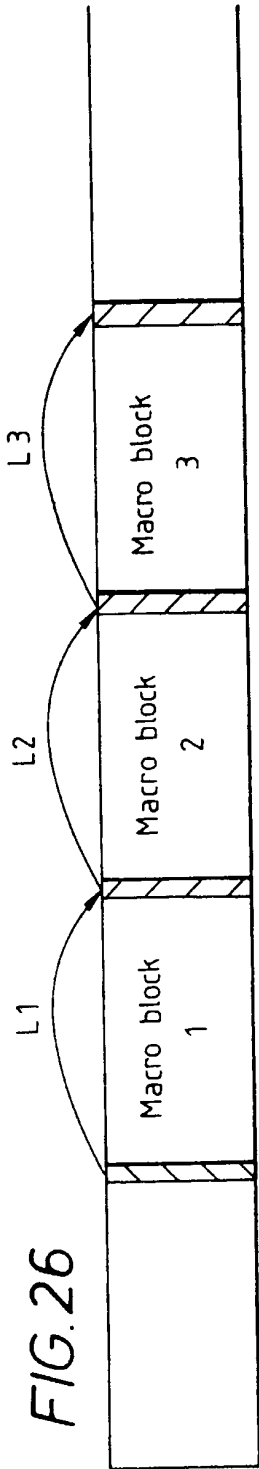


FIG. 25 (2/2)





**FIG. 27**

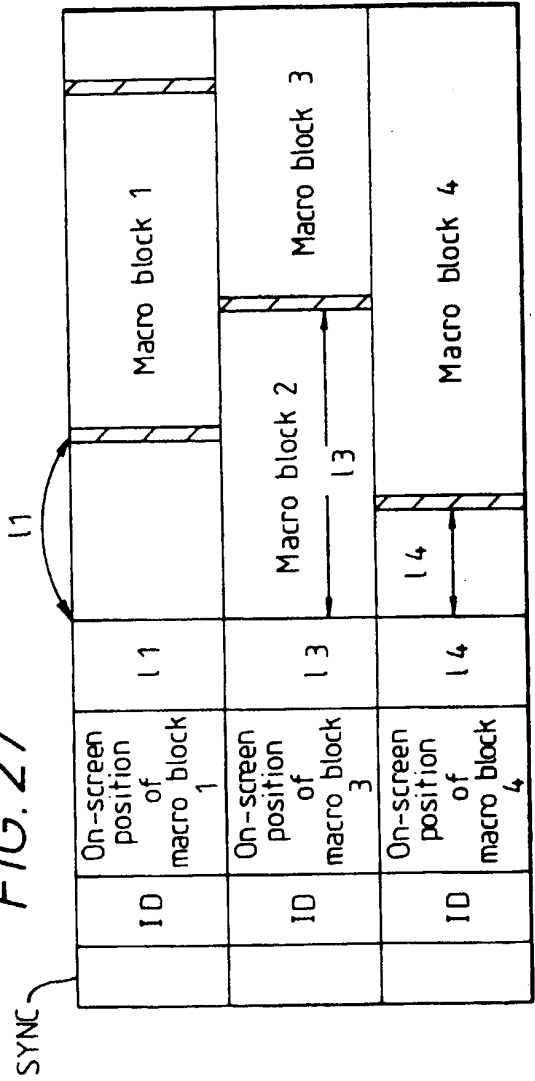


FIG. 28


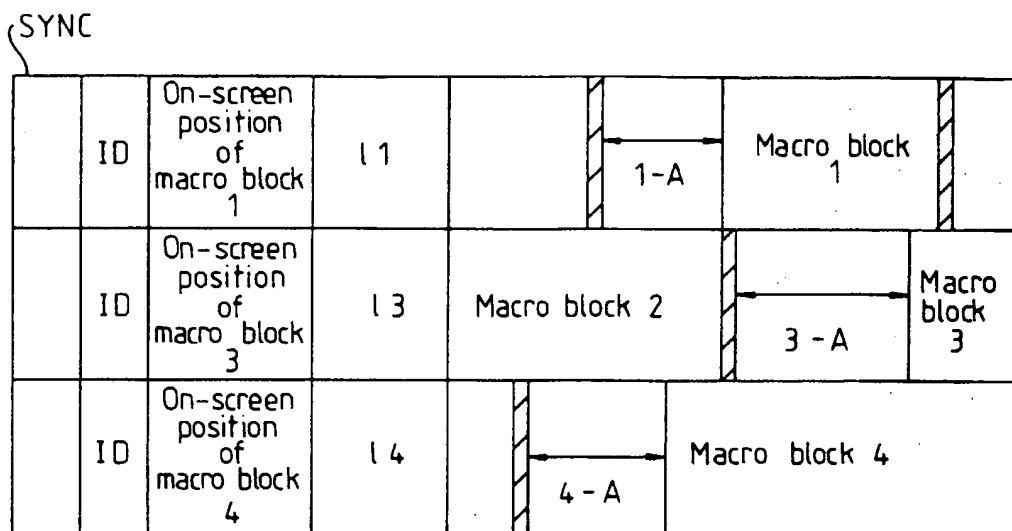


FIG. 29

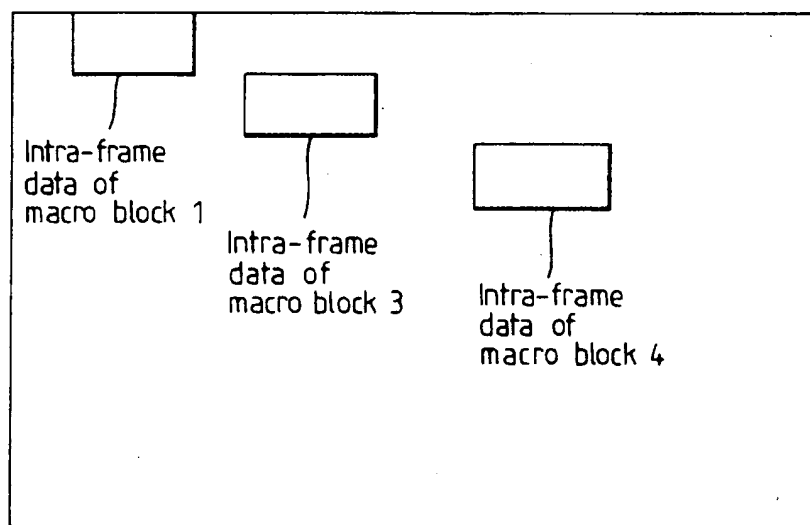

THIS PAGE BLANK (USPTO)

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

THIS PAGE BLANK (USPTO)